



## TRANQUILITY VERTICAL STACK (TRM) SERIES



SIZE 09 - 36 (2.6kW - 10.6kW)  
VERTICAL HI-RISE  
R410A - 60Hz STANDARD RANGE



# TRANQUILITY VERTICAL STACK (TRM) SERIES



R410A - 60Hz STANDARD RANGE  
VERTICAL HI-RISE  
SIZE 09 - 36 (2.6kW - 10.6kW)

**TRANQUILITY VERTICAL STACK (TRM) SERIES WITH EARTHPURE® REFRIGERANT**

The Tranquility Vertical Stack (TRM) series offers an innovative, labor-saving solution for spaces where individual, quiet control of the heating and cooling system is important. TRM units' pre-piped risers and pre-wired cabinets are especially ideal for multi-story buildings. Cabinets can operate as stand-alone "ductless" systems, or can be ducted to an adjacent room, making them convenient for low-rise buildings as well. The TRM series exceeds ASHRAE 90.1 efficiencies, yet maintains small cabinet dimensions. Using EarthPure refrigerant, the Tranquility Modular not only protects the environment, it does so while delivering unprecedented comfort, efficiency, and reliability.

Available in sizes 3/4 ton (2.6 kW) through 3 tons (10.6 kW) with numerous cabinet, water piping and control choices, the TRM series offers a wide range of units for most any installation. The TRM has an extended range refrigerant circuit, capable of ground loop (geothermal) applications as well as water loop (boiler-tower) applications. Standard features are many. Microprocessor controls, TXV metering device, galvanized steel cabinet, torsion-flex blower motor mounting, and (optional) e-coated air coil are just some of the features of the innovative TRM series.

ClimateMaster's exclusive double isolation compressor mounting system makes the TRM series the quietest vertical stack units on the market. Compressors are mounted on rubber grommets to a heavy gauge mounting plate, which is then isolated from the cabinet base with vibration isolation springs for maximized vibration/sound attenuation. Options such as DDC controls, internal pump and factory-installed water solenoid valves allow customized design solutions.

The TRM Series vertical stack water-source heat pumps are designed to meet the challenges of today's HVAC demands with a low cost/high value solution.

**UNIT FEATURES**

- Sizes 09 (3/4 ton, 2.6 kW) through 36 (3 ton, 10.6 kW)
- Environmentally-friendly EarthPure® (HFC-410A) zero ozone depletion refrigerant
- High efficiency rotary and scroll compressors
- Exceeds ASHRAE 90.1 efficiencies
- Removable chassis allows staged installation and ease of maintenance
- Galvanized steel cabinet
- Unique double isolation compressor mounting for quiet operation
- TXV metering device
- Unit or remote-mounted controls available
- Microprocessor controls standard (optional DXM and/or DDC controls)
- LonWorks, BACnet, Modbus and Johnson N2 compatibility options for DDC controls
- Unit Performance Sentinel performance monitoring system
- Integrated drain pan with condensate overflow sensor
- Attractive return air panel with hinged access door ("G" panel)
- Multiple supply air discharge options
- Stainless steel braided hose kits for connection from piping risers to chassis
- Eight Safeties Standard
- Wide variety of options including disconnect switch and internal pumps

## Selection Procedure

### Reference Calculations

Heating	Cooling
$LWT = EWT - \frac{HE}{GPM \times 500}$	$LWT = EWT + \frac{HR}{GPM \times 500}$
$LAT = EAT + \frac{HC}{CFM \times 1.08}$	$LAT (DB) = EAT (DB) - \frac{SC}{CFM \times 1.08}$
	$LC = TC - SC$
	$S/T = \frac{SC}{TC}$

### Legend and Glossary of Abbreviations

BTUH = BTU( British Thermal Unit) per hour	HWC = hot water generator (desuperheater) capacity, Mbtuh
CFM = airflow, cubic feet/minute	IPT = internal pipe thread
COP = coefficient of performance = BTUH output/BTUH input	KW = total power unit input, kilowatts
DB = dry bulb temperature (°F)	LAT = leaving air temperature, °F
EAT = entering air temperature, Fahrenheit (dry bulb/wet bulb)	LC = latent cooling capacity, BTUH
EER = energy efficiency ratio = BTUH output/Watt input	LWT = leaving water temperature, °F
EPT = external pipe thread	MBTUH = 1000 BTU per hour
ESP = external static pressure (inches w.g.)	S/T = sensible to total cooling ratio
EWT = entering water temperature	SC = sensible cooling capacity, BTUH
GPM = water flow in U.S. gallons/minute	TC = total cooling capacity, BTUH
HE = total heat of extraction, BTUH	WB = wet bulb temperature (°F)
HC = air heating capacity, BTUH	WPD = waterside pressure drop (psi & ft. of hd.)
HR = total heat of rejection, BTUH	

### Conversion Table - to convert inch-pound (English) to SI (Metric)

Air Flow	Water Flow	Ext Static Pressure	Water Pressure Drop
Airflow (L/s) = CFM x 0.472	Water Flow (L/s) = gpm x 0.0631	ESP (Pa) = ESP (in of wg) x 249	PD (kPa) = PD (ft of hd) x 2.99



## Selection Procedure

- Step 1** Determine the actual heating and cooling loads at the desired dry bulb and wet bulb conditions.
- Step 2** Obtain the following design parameters: Entering water temperature, water flow rate in GPM, air flow in CFM, water flow pressure drop and design wet and dry bulb temperatures. Air flow CFM should be between 300 and 450 CFM per ton. Unit water pressure drop should be kept as close as possible to each other to make water balancing easier. Go to the appropriate tables and find the proper indicated water flow and water temperature.
- Step 3** Select a unit based on total and sensible cooling conditions. Select a unit which is closest to, but no larger than, the actual cooling load.
- Step 4** Enter tables at the design water flow and water temperature. Read the total and sensible cooling capacities (Note: interpolation is permissible, extrapolation is not).
- Step 5** Read the heating capacity. If it exceeds the design criteria it is acceptable. It is quite normal for Water-Source Heat Pumps to be selected on cooling capacity only since the heating output is usually greater than the cooling capacity.
- Step 6** Determine the correction factors associated with the variable factors of dry bulb and wet bulb (page 14).
- Corrected Total Cooling = tabulated total cooling x wet bulb correction.  
Corrected Sensible Cooling = tabulated sensible cooling x wet/dry bulb correction.
- Step 7** Compare the corrected capacities to the load requirements. Normally if the capacities are within 10% of the loads, the equipment is acceptable. It is better to undersize than oversize, as undersizing improves humidity control, reduces sound levels and extends the life of the equipment.
- Step 8** When completed, calculate water temperature rise and assess the selection. If the units selected are not within 10% of the load calculations, then review what effect changing the GPM, water temperature and/or air flow and air temperature would have on the corrected capacities. If the desired capacity cannot be achieved, select the next larger or smaller unit and repeat the procedure. Remember, when in doubt, undersize slightly for best performance.

## Example Equipment Selection For Cooling

## Step 1 Load Determination:

Assume we have determined that the appropriate cooling load at the desired dry bulb 80°F and wet bulb 65°F conditions is as follows:

Total Cooling ..... 15,100 BTUH  
Sensible Cooling..... 10,500 BTUH  
Entering Air Temp ..... 80°F Dry Bulb / 65°F Wet Bulb

## Step 2 Design Conditions:

Similarly, we have also obtained the following design parameters:

Entering Water Temp ..... 90°F  
Water Flow (Based upon 10°F rise in temp.) 4.5 GPM  
Air Flow ..... 515 CFM

## Step 3, 4 &amp; 5 HP Selection:

After making our preliminary selection (TRM18), we enter the tables at design water flow and water temperature and read Total Cooling, Sens. Cooling and Heat of Rej. capacities:

Total Cooling ..... 16,800 BTUH  
Sensible Cooling..... 12,500 BTUH  
Heat of Rejection ..... 21,300 BTUH

## Step 6 &amp; 7 Entering Air and Airflow Corrections:

Next, we determine our correction factors.

	Table	Ent Air	Air Flow	Corrected
Corrected Total Cooling =	16,800 x	0.957 x	0.934 =	15,016
Corrected Sens Cooling =	12,500 x	1.093 x	0.833 =	11,381
Corrected Heat of Reject =	21,300 x	0.970 x	0.952 =	19,669

## Step 8 Water Temperature Rise Calculation &amp; Assessment:

Actual Temperature Rise 8.9°F


When we compare the Corrected Total Cooling and Corrected Sensible Cooling figures with our load requirements stated in Step 1, we discover that our selection is within +/- 10% of our sensible load requirement. Furthermore, we see that our Corrected Total Cooling figure is slightly undersized as recommended, when compared to the actual indicated load.

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## TRM Series Nomenclature

## Cabinet

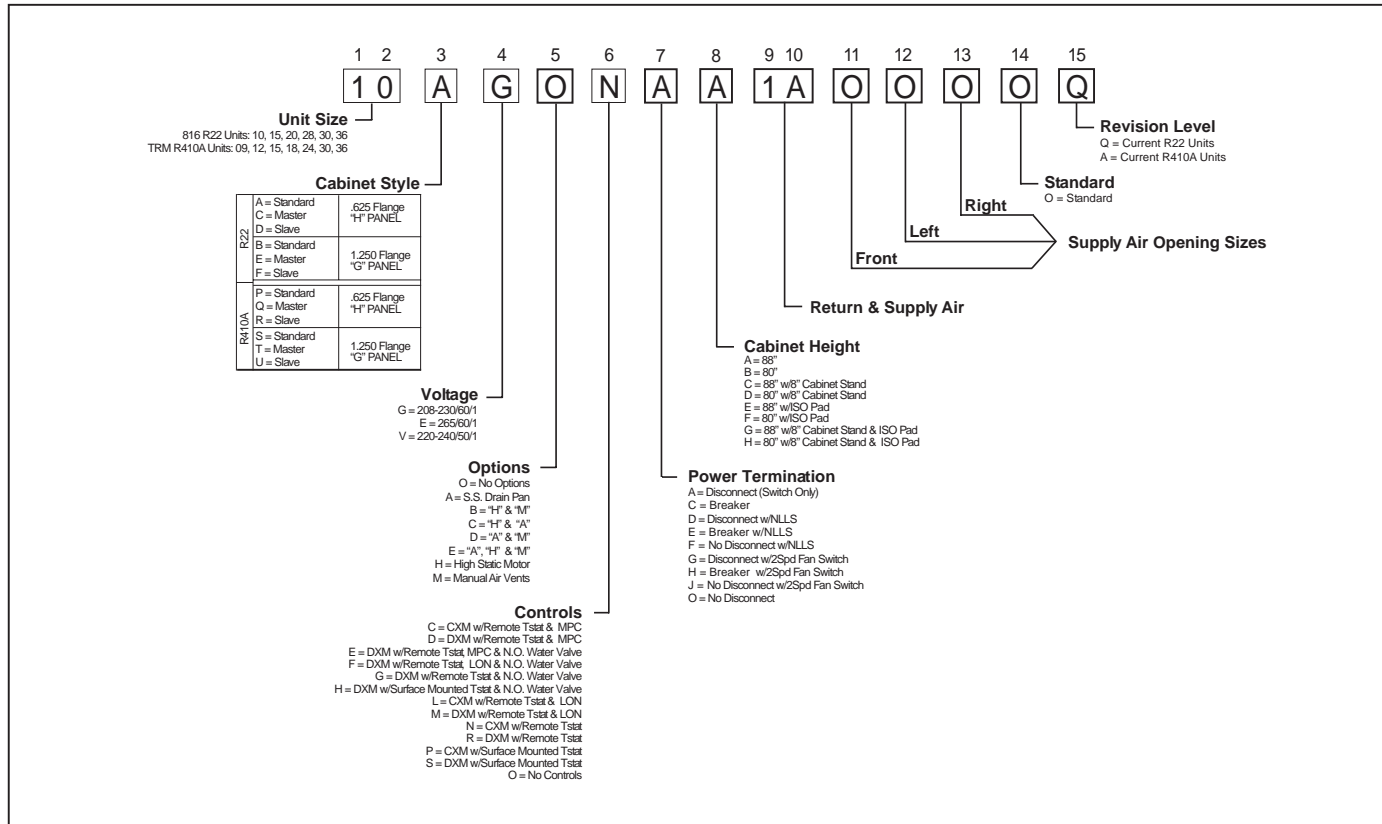

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## TRM Series Nomenclature

## Chassis

1 2 3 4 5 6 7 8 9 10 11 12

**TRM** **09** **G** **S** **S** **S** **C** **S** **A**

**Series**  
TRM = Tranquility High Rise Chassis

**Unit Size**  
09, 12, 15, 18, 24, 30, 36

**Voltage**  
G = 208-230/60/1

**Options**  
S = Standard for use with CXM or DXM  
A = Standard w/Stainless Steel Drain Pan  
B = Standard w/Return Air Sensor  
C = Standard w/Return Air Sensor & Stainless Steel Drain Pan

**Revision Level**  
A = Current Revision Level

**Standard**  
S = Standard

**Heat Exchanger Options**

	Non Coated Air Coil		Coated Air Coil	
	Copper	Cupro-Nickel	Copper	Cupro-Nickel
Standard	L	M	C	N
Extended Range	F	G	D	E

**Water Valve & Pump Option**  
S = No Water valve  
M = Normally Closed Water Valve  
N = Normally Open Water Valve  
P = Secondary Circulating Pump

**Auto Flow Regulator**

	5/8 SWEAT		7/8 SWEAT			
	UNIT 09	UNIT 12	UNIT 15 & 18	UNIT 24	UNIT 30	UNIT 36
C	1.5					
D	2.0	2.0				
E	2.5	2.5	2.5			
F	3.0	3.0	3.0			
G	3.5		3.5			
H		4.0	4.0	4.0		
J		5.0	5.0	5.0	5.0	
K			6.0	6.0	6.0	6.0
L			7.0	7.0	7.0	7.0
M				8.0	8.0	8.0
N				9.0	9.0	9.0
P					10.0	10.0
S = STANDARD - NO FLOW REGULATOR						


Rev.: 01/11/07D

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D


## TRM Series Nomenclature

## Hose Kit

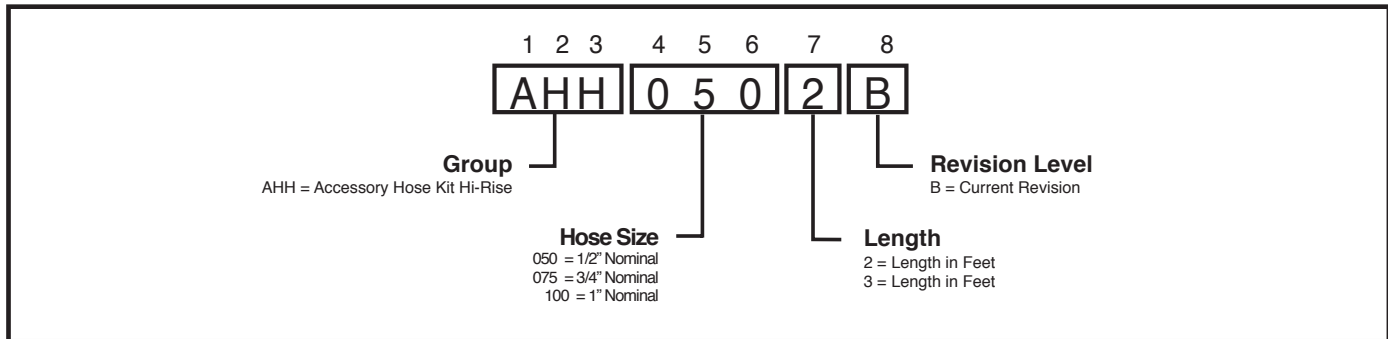


Rev.: 10/04/05D

## Return Air Panel

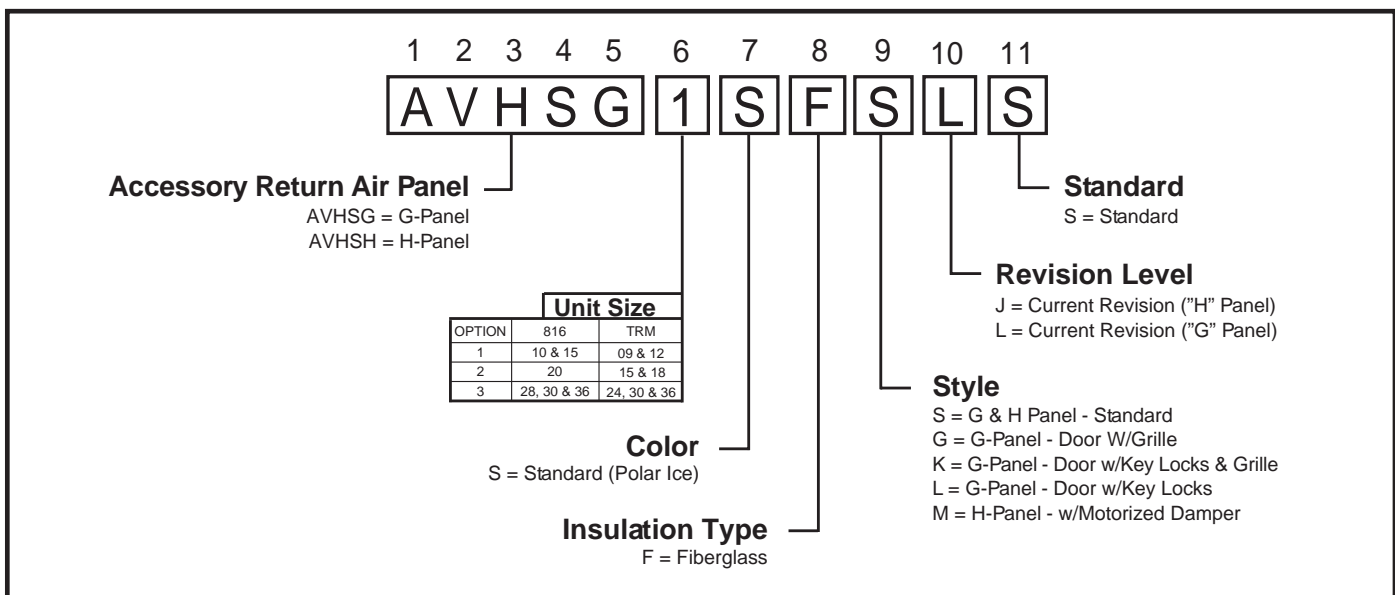

Rev.: 10/23/06D

## Supply Air Grille

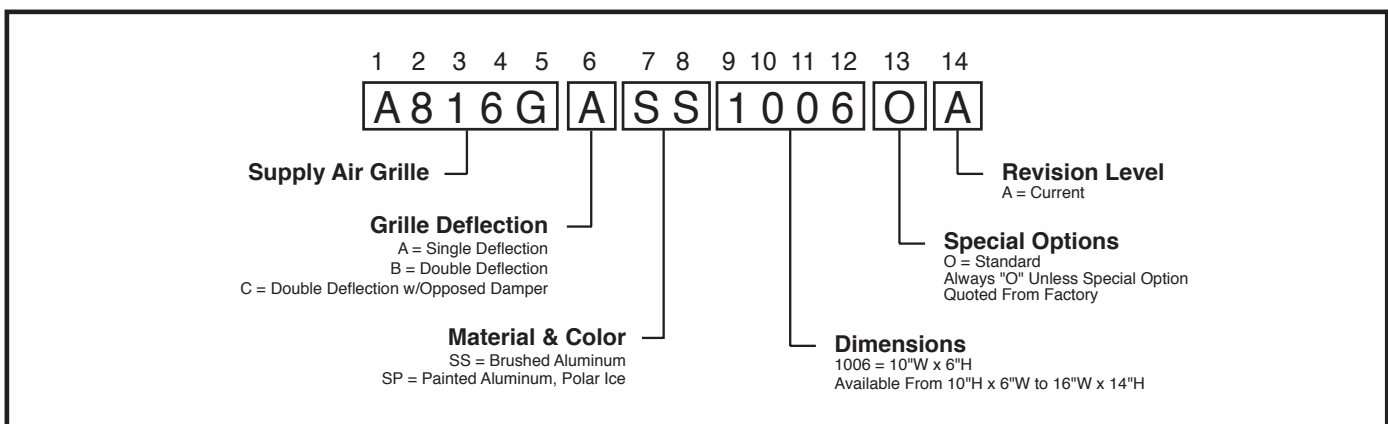

Rev.: 10/04/05D



# Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## Performance Data ARI/ASHRAE/ISO 13256-1

ASHRAE/ARI/ISO 13256-1. English (IP) Units

Model	Water Loop Heat Pump				Ground Water Heat Pump				Ground Loop Heat Pump			
	Cooling 86°F		Heating 68°F		Cooling 59°F		Heating 50°F		Cooling 77°F		Heating 32°F	
	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP
TRM09	8,800	13.0	12,500	4.6	10,100	19.5	9,800	3.8	9,300	14.7	7,200	3.1
TRM12	11,600	13.0	15,800	4.5	13,700	20.0	12,700	3.8	12,200	15.0	9,500	3.1
TRM15	13,800	13.0	19,600	4.7	16,500	20.0	15,500	3.9	15,200	14.6	11,500	3.1
TRM18	16,700	13.0	22,600	4.7	19,600	19.5	18,200	3.8	17,600	14.6	14,000	3.1
TRM24	22,100	13.0	29,400	4.5	26,400	20.0	23,100	3.8	23,600	14.8	18,000	3.1
TRM30	27,100	13.0	33,100	4.6	30,600	18.6	27,700	4.0	29,200	16.0	20,600	3.1
TRM36	32,000	12.5	39,500	4.6	36,700	18.8	32,000	3.8	33,000	14.3	25,000	3.1

Cooling capacities based upon 80.6°F DB, 66.2°F WB entering air temperature  
 Heating capacities based upon 68°F DB, 59°F WB entering air temperature  
 All air flow is rated on high speed  
 All ratings based upon operation at lower voltage of dual voltage rated models

ASHRAE/ARI/ISO 13256-1. Metric (SI) Units

Model	Water Loop Heat Pump				Ground Water Heat Pump				Ground Loop Heat Pump			
	Cooling 30°C		Heating 20°C		Cooling 15°C		Heating 10°C		Cooling 25°C		Heating 0°C	
	Capacity Watts	EER W/W	Capacity Watts	COP	Capacity Watts	EER W/W	Capacity Watts	COP	Capacity Watts	EER W/W	Capacity Watts	COP
TRM09	2,579	3.8	3,664	4.6	2,930	5.7	2,872	3.8	2,726	4.3	2,110	3.1
TRM12	3,400	3.8	4,631	4.5	4,015	5.9	3,722	3.8	3,576	4.4	2,784	3.1
TRM15	4,045	3.8	5,744	4.7	4,836	5.9	4,543	3.9	4,455	4.3	3,370	3.1
TRM18	4,894	3.8	6,624	4.7	5,744	5.7	5,334	3.8	5,158	4.3	4,103	3.1
TRM24	6,477	3.8	8,617	4.5	7,737	5.9	6,770	3.8	6,917	4.3	5,276	3.1
TRM30	7,943	3.8	9,701	4.6	8,969	5.5	8,118	4.0	8,558	4.7	6,038	3.1
TRM36	9,379	3.7	11,577	4.6	10,756	5.5	9,379	3.8	9,672	4.2	7,327	3.1

Cooling capacities based upon 27°C DB, 19°C WB entering air temperature  
 Heating capacities based upon 20°C DB, 15°C WB entering air temperature  
 All air flow is rated on high speed  
 All ratings based upon operation at lower voltage of dual voltage rated models

## Performance Data Selection Notes

For operation in the shaded area when water is used in lieu of an anti-freeze solution, the LWT (Leaving Water Temperature) must be calculated. Flow must be maintained to a level such that the LWT is maintained above 42°F [5.6°C] when the JW3 jumper is not clipped (see example below). This is due to the potential of the refrigerant temperature being as low as 32°F [0°C] with 40°F [4.4°C] LWT, which may lead to a nuisance cutout due to the activation of the Low Temperature Protection. JW3 should never be clipped for standard range equipment or systems without antifreeze.

### Example:

At 50°F EWT (Entering Water Temperature) and 1.5 gpm/ton, a 3 ton unit has a HE of 22,500 Btuh. To calculate LWT, rearrange the formula for HE as follows:

$HE = TD \times GPM \times 500$ , where HE = Heat of Extraction (Btuh); TD = temperature difference (EWT - LWT) and GPM = U.S. Gallons per Minute.

$$TD = HE / (GPM \times 500)$$

$$TD = 22,500 / (4.5 \times 500)$$

$$TD = 10^\circ\text{F}$$

$$LWT = EWT - TD$$

$$LWT = 50 - 10 = 40^\circ\text{F}$$

In this example, a higher flow rate will be required for EWTs at or below 50°F without antifreeze. At 2 gpm/ton, the calculation above results in a TD of 7.5.  $LWT = 50 - 7.5 = 42.5^\circ\text{F}$ , which is above 42°F EWT, and is acceptable for this application.

		Heating - EAT 70°F				
	EER	HC	kW	HE	LAT	COP
12.6	25.8	5.6	0.65	3.4	82.9	2.53
12.6	27.6	6.5	0.67	4.2	84.8	2.83
12.6	28.4	6.8	0.68	4.5	85.6	2.95
12.5	23.1	7.0	0.68	4.7	86.0	3.01
12.5	25.1	7.7	0.69	5.4	87.7	3.26
12.5	26.1	8.2	0.70	5.8	88.7	3.42
12.5	26.1	8.4	0.71	6.1	89.3	3.51
20.2		9.0	0.71	6.6	90.7	3.70
22.3		9.6	0.72	7.1	91.9	3.89
3		9.9	0.73	7.4	92.7	3.99
10.3		10.3	0.73	7.9	93.6	4.12
5.4		10.3	0.74	8.5	95.0	4.25

# Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## Performance Data TRM09

405 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, TRM09 (Cv = 4.9, MOPD = 125 psi)			EWT °F	GPM	WPD*		Cooling - EAT 80/67°F						Heating - EAT 70°F				
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP
			20	2.25	3.5	8.2	Operation Not Recommended						5.6	0.65	3.4	82.9	2.53
GPM	WPD Adder		30	1.10	0.6	1.3	11.1	7.2	0.65	0.43	12.6	25.8	6.5	0.67	4.2	84.8	2.83
	PSI	FT		1.70	1.7	4.0	11.2	7.3	0.65	0.41	12.6	27.6	6.8	0.68	4.5	85.6	2.95
1.10	0.25	0.58	40	2.25	3.3	7.6	11.3	7.3	0.64	0.40	12.6	28.4	7.0	0.68	4.7	86.0	3.01
1.70	0.64	1.48		1.10	0.5	1.2	10.9	7.2	0.66	0.47	12.5	23.1	7.7	0.69	5.4	87.7	3.26
2.25	1.27	2.93		1.70	1.6	3.7	11.1	7.2	0.65	0.44	12.5	25.1	8.2	0.70	5.8	88.7	3.42
			50	2.25	3.1	7.2	11.1	7.2	0.65	0.43	12.6	26.1	8.4	0.71	6.1	89.3	3.51
				1.10	0.5	1.2	10.6	7.1	0.67	0.52	12.3	20.2	9.0	0.71	6.6	90.7	3.70
				1.70	1.5	3.5	10.8	7.2	0.66	0.49	12.4	22.3	9.6	0.72	7.1	91.9	3.89
			60	2.25	2.9	6.8	10.9	7.2	0.66	0.47	12.5	23.3	9.9	0.73	7.4	92.7	3.99
				1.10	0.5	1.1	10.1	7.0	0.69	0.58	12.1	17.4	10.3	0.73	7.9	93.6	4.13
				1.70	1.4	3.3	10.5	7.1	0.68	0.54	12.3	19.4	11.0	0.74	8.5	95.2	4.35
			70	2.25	2.8	6.4	10.6	7.1	0.67	0.52	12.3	20.4	11.4	0.75	8.8	96.0	4.47
				1.10	0.5	1.1	9.6	6.9	0.71	0.65	11.8	14.8	11.6	0.75	9.1	96.6	4.55
				1.70	1.4	3.2	10.0	7.0	0.70	0.60	12.0	16.6	12.4	0.76	9.8	98.3	4.78
			80	2.25	2.7	6.1	10.2	7.0	0.69	0.58	12.1	17.6	12.8	0.76	10.2	99.2	4.91
				1.10	0.5	1.0	9.0	6.6	0.74	0.72	11.4	12.4	12.9	0.76	10.3	99.4	4.94
				1.70	1.3	3.1	9.4	6.8	0.72	0.67	11.7	14.0	13.7	0.77	11.0	101.2	5.18
			85	2.25	2.6	5.9	9.6	6.9	0.71	0.65	11.8	14.9	14.1	0.78	11.4	102.2	5.30
				1.10	0.5	1.0	8.6	6.5	0.75	0.76	11.2	11.4	13.5	0.77	10.9	100.8	5.12
				1.70	1.3	3.1	9.1	6.7	0.74	0.71	11.5	12.9	14.3	0.78	11.6	102.6	5.35
			90	2.25	2.6	5.9	9.3	6.8	0.73	0.69	11.6	13.7	14.7	0.79	12.0	103.5	5.46
				1.10	0.4	1.0	8.2	6.3	0.76	0.80	10.9	10.3	14.0	0.78	11.4	102.1	5.29
				1.70	1.3	3.0	8.7	6.5	0.75	0.75	11.3	11.7	14.8	0.79	12.1	103.9	5.51
			100	2.25	2.5	5.8	9.0	6.6	0.74	0.72	11.4	12.4	15.2	0.79	12.5	104.8	5.62
				1.10	0.4	1.0	7.3	5.8	0.79	0.88	10.3	8.3	Operation Not Recommended				
				1.70	1.3	2.9	7.9	6.1	0.78	0.83	10.7	9.5					
			2.25	2.5	5.7	8.2	6.3	0.77	0.80	10.9	10.2						
			110	1.10	0.4	0.9	6.3	5.2	0.83	0.96	9.6	6.6					
				1.70	1.3	2.9	6.9	5.6	0.81	0.91	10.0	7.6					
				2.25	2.4	5.6	7.2	5.8	0.80	0.89	10.3	8.2					
			120	1.10	0.4	0.9	5.2	4.5	0.86	1.04	8.8	5.0	Operation Not Recommended				
				1.70	1.3	2.9	5.8	4.9	0.84	1.00	9.2	5.9					
				2.25	2.4	5.6	6.2	5.1	0.83	0.97	9.5	6.3					

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded area.

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

Performance Data  
TRM12

445 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, TRM12 (Cv = 4.9, MOPD = 125 psi)			EWT °F	GPM	WPD*		Cooling - EAT 80/67°F						Heating - EAT 70°F				
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP
			20	3.0	6.2	14.3	Operation Not Recommended						7.7	0.83	4.9	85.9	2.70
GPM	WPD Adder		30	1.5	1.4	3.2	15.1	9.4	0.62	0.53	16.8	28.5	8.6	0.86	5.8	88.0	2.96
	PSI	FT		2.3	3.2	7.3	15.2	9.4	0.62	0.49	16.8	31.0	9.1	0.87	6.1	88.8	3.07
1.5	0.46	1.06		3.0	5.8	13.4	15.2	9.4	0.62	0.47	16.8	32.2	9.3	0.87	6.4	89.3	3.13
2.3	1.17	2.70	40	1.5	1.2	2.8	14.7	9.2	0.63	0.59	16.7	24.8	10.2	0.89	7.2	91.2	3.35
3.0	2.16	4.99		2.3	2.9	6.6	15.0	9.4	0.62	0.55	16.8	27.5	10.7	0.90	7.7	92.3	3.49
				3.0	5.3	12.1	15.1	9.4	0.62	0.52	16.8	28.8	11.0	0.91	8.0	93.0	3.56
			50	1.5	1.2	2.7	14.1	9.0	0.64	0.66	16.4	21.3	11.8	0.92	8.7	94.5	3.74
				2.3	2.8	6.4	14.6	9.2	0.63	0.61	16.6	23.8	12.4	0.94	9.3	95.9	3.90
				3.0	5.1	11.8	14.8	9.3	0.63	0.59	16.7	25.2	12.8	0.94	9.6	96.7	3.98
			60	1.5	1.1	2.6	13.4	8.7	0.65	0.74	15.9	18.1	13.4	0.95	10.1	97.8	4.11
				2.3	2.6	6.1	13.9	8.9	0.64	0.69	16.2	20.3	14.2	0.97	10.9	99.5	4.29
				3.0	4.8	11.2	14.2	9.0	0.64	0.66	16.4	21.6	14.6	0.98	11.3	100.4	4.38
			70	1.5	1.1	2.4	12.6	8.3	0.66	0.83	15.4	15.2	15.0	0.98	11.6	101.1	4.46
				2.3	2.5	5.7	13.2	8.6	0.65	0.77	15.8	17.1	15.8	1.00	12.4	102.9	4.64
				3.0	4.6	10.7	13.4	8.7	0.65	0.74	15.9	18.2	16.3	1.01	12.9	103.9	4.74
			80	1.5	1.0	2.3	11.6	7.9	0.68	0.91	14.7	12.7	16.5	1.01	13.1	104.3	4.78
				2.3	2.3	5.4	12.3	8.2	0.67	0.85	15.2	14.3	17.4	1.03	13.9	106.2	4.96
				3.0	4.4	10.1	12.6	8.3	0.66	0.82	15.4	15.2	17.9	1.04	14.3	107.2	5.06
			85	1.5	1.0	2.2	11.1	7.7	0.69	0.96	14.4	11.6	17.2	1.02	13.7	105.8	4.92
				2.3	2.3	5.3	11.8	8.0	0.68	0.90	14.8	13.1	18.1	1.04	14.6	107.7	5.10
				3.0	4.3	9.9	12.1	8.1	0.67	0.87	15.0	13.9	18.6	1.05	15.0	108.6	5.19
			90	1.5	0.9	2.1	10.6	7.5	0.71	1.01	14.0	10.6	17.9	1.04	14.4	107.3	5.06
				2.3	2.2	5.2	11.3	7.8	0.69	0.95	14.5	11.9	18.8	1.05	15.2	109.1	5.23
				3.0	4.2	9.7	11.6	7.9	0.68	0.92	14.7	12.6	19.2	1.06	15.6	110.1	5.32
			100	1.5	0.9	2.1	9.6	7.1	0.74	1.10	13.3	8.7	Operation Not Recommended				
				2.3	2.2	5.1	10.2	7.3	0.72	1.04	13.8	9.8					
				3.0	4.2	9.6	10.5	7.5	0.71	1.01	14.0	10.4					
			110	1.5	0.9	2.0	8.5	6.6	0.77	1.20	12.6	7.1					
				2.3	2.1	4.9	9.1	6.9	0.75	1.14	13.0	8.0					
				3.0	4.0	9.3	9.4	7.0	0.74	1.11	13.2	8.5					
			120	1.5	0.9	2.0	7.4	6.1	0.82	1.30	11.9	5.7					
				2.3	2.1	4.8	8.0	6.4	0.79	1.24	12.3	6.4					
				3.0	4.0	9.2	8.3	6.5	0.78	1.22	12.5	6.8					

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded area.

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

Performance Data  
TRM15

595 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, TRM15 (Cv = 4.9, MOPD = 125 psi)			EWT °F	GPM	WPD*		Cooling - EAT 80/67°F						Heating - EAT 70°F					
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP	
						20	3.8	2.1	4.8	Operation Not Recommended						9.3	0.99	5.9
GPM	WPD Adder		30	1.9	0.3	0.8	19.0	12.1	0.64	0.64	21.2	29.5	10.4	1.01	7.0	86.3	3.0	
	PSI	FT		2.8	0.6	1.4	19.5	12.1	0.62	0.60	21.5	32.5	10.9	1.02	7.5	87.0	3.1	
1.9	0.74	1.71		3.8	1.8	4.2	19.7	12.0	0.61	0.58	21.6	34.0	11.2	1.03	7.7	87.4	3.2	
2.8	1.74	4.02	40	1.9	0.3	0.7	18.2	11.9	0.65	0.72	20.6	25.5	12.3	1.05	8.7	89.1	3.4	
3.8	2.16	4.99		2.8	0.5	1.2	18.8	12.1	0.64	0.66	21.0	28.4	12.9	1.06	9.3	90.1	3.6	
				3.8	1.6	3.8	19.1	12.1	0.63	0.64	21.2	30.0	13.3	1.06	9.7	90.6	3.7	
			50	1.9	0.3	0.6	17.3	11.5	0.67	0.80	20.0	21.6	14.2	1.08	10.5	92.1	3.9	
				2.8	0.5	1.2	18.0	11.8	0.66	0.74	20.4	24.3	15.0	1.09	11.3	93.3	4.0	
				3.8	1.5	3.5	18.3	11.9	0.65	0.71	20.7	25.8	15.4	1.10	11.7	94.0	4.1	
			60	1.9	0.3	0.6	16.2	11.1	0.68	0.89	19.2	18.2	16.1	1.11	12.4	95.1	4.3	
				2.8	0.5	1.1	17.0	11.4	0.67	0.83	19.8	20.5	17.1	1.13	13.2	96.5	4.4	
				3.8	1.4	3.3	17.4	11.6	0.67	0.79	20.0	21.8	17.6	1.13	13.7	97.4	4.6	
			70	1.9	0.2	0.5	15.1	10.5	0.70	0.99	18.4	15.2	18.1	1.14	14.2	98.1	4.7	
				2.8	0.4	1.0	15.9	10.9	0.69	0.93	19.0	17.1	19.2	1.16	15.2	99.8	4.9	
				3.8	1.3	3.0	16.2	11.1	0.68	0.89	19.2	18.2	19.8	1.17	15.8	100.7	5.0	
			80	1.9	0.2	0.5	13.8	10.0	0.72	1.10	17.6	12.6	20.0	1.17	16.1	101.2	5.0	
				2.8	0.4	1.0	14.6	10.3	0.71	1.03	18.1	14.2	21.2	1.19	17.2	103.1	5.2	
				3.8	1.3	2.9	15.0	10.5	0.70	1.00	18.4	15.1	21.9	1.20	17.8	104.1	5.3	
			85	1.9	0.2	0.5	13.2	9.7	0.73	1.16	17.1	11.5	21.0	1.19	17.0	102.7	5.2	
				2.8	0.4	1.0	14.0	10.0	0.72	1.09	17.7	12.9	22.3	1.21	18.1	104.6	5.4	
				3.8	1.2	2.8	14.4	10.2	0.71	1.05	18.0	13.7	22.9	1.22	18.8	105.7	5.5	
			90	1.9	0.2	0.5	12.6	9.4	0.75	1.22	16.7	10.3	22.0	1.20	17.9	104.2	5.4	
				2.8	0.4	0.9	13.3	9.7	0.73	1.15	17.2	11.6	23.3	1.23	19.1	106.2	5.6	
				3.8	1.2	2.8	13.7	9.9	0.72	1.11	17.5	12.4	24.0	1.24	19.7	107.3	5.7	
			100	1.9	0.2	0.5	11.3	8.9	0.79	1.33	15.8	8.5	Operation Not Recommended					
				2.8	0.4	0.9	12.0	9.2	0.76	1.27	16.3	9.5						
				3.8	1.2	2.7	12.4	9.3	0.75	1.23	16.6	10.1						
			110	1.9	0.2	0.5	10.0	8.4	0.84	1.46	15.0	6.9						
				2.8	0.4	0.8	10.7	8.6	0.81	1.39	15.4	7.7						
				3.8	1.1	2.5	11.0	8.8	0.80	1.35	15.7	8.2						
			120	1.9	0.2	0.4	8.7	7.9	0.91	1.58	14.1	5.5						
				2.8	0.4	0.8	9.4	8.1	0.87	1.52	14.5	6.2						
				3.8	1.1	2.4	9.7	8.3	0.85	1.48	14.8	6.5						

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded area.

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

Performance Data  
TRM18

685 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, TRM18 (Cv = 10.3, MOPD = 125 psi)			EWT °F	GPM	WPD*		Cooling - EAT 80/67°F						Heating - EAT 70°F				
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP
			20	4.5	3.8	8.8	Operation Not Recommended						11.6	1.19	7.6	85.7	2.82
			WPD Adder		2.3	0.7	1.5	21.9	14.8	0.67	0.77	24.5	28.3	12.7	1.21	8.6	87.2
GPM	PSI	FT	30	3.4	1.8	4.3	22.2	14.8	0.67	0.73	24.6	30.6	13.2	1.21	9.1	87.9	3.15
2.3	0.24	0.55		4.5	3.5	8.0	22.3	14.8	0.66	0.71	24.6	31.5	13.5	1.22	9.4	88.3	3.20
3.4	0.58	1.34	40	2.3	0.6	1.3	21.3	14.6	0.68	0.86	24.1	24.9	14.7	1.23	10.4	89.8	3.43
4.5	1.10	2.54		3.4	1.7	3.9	21.8	14.7	0.68	0.79	24.4	27.4	15.3	1.24	11.1	90.7	3.56
				4.5	3.2	7.3	22.0	14.8	0.67	0.77	24.5	28.6	15.7	1.24	11.5	91.3	3.64
			50	2.3	0.6	1.3	20.4	14.2	0.70	0.96	23.6	21.3	16.8	1.26	12.5	92.7	3.84
				3.4	1.6	3.6	21.0	14.5	0.69	0.88	24.0	23.8	17.6	1.27	13.3	93.8	4.01
				4.5	2.9	6.8	21.3	14.6	0.68	0.85	24.1	25.1	18.1	1.27	13.7	94.5	4.10
			60	2.3	0.5	1.1	19.3	13.7	0.71	1.07	22.9	18.1	19.0	1.28	14.6	95.6	4.25
				3.4	1.4	3.3	20.1	14.0	0.70	0.99	23.4	20.3	20.0	1.30	15.6	97.1	4.45
				4.5	2.7	6.3	20.4	14.2	0.69	0.95	23.6	21.5	20.6	1.30	16.1	97.8	4.55
			70	2.3	0.5	1.1	18.2	13.1	0.72	1.20	22.2	15.2	21.2	1.31	16.7	98.7	4.66
				3.4	1.3	3.0	19.0	13.5	0.71	1.11	22.7	17.0	22.4	1.32	17.8	100.3	4.87
				4.5	2.5	5.8	19.4	13.7	0.71	1.07	22.9	18.1	23.0	1.33	18.4	101.1	4.98
			80	2.3	0.5	1.1	16.9	12.5	0.74	1.34	21.4	12.6	23.4	1.34	18.8	101.6	5.05
				3.4	1.3	3.0	17.7	12.9	0.73	1.25	21.9	14.2	24.6	1.35	20.0	103.3	5.27
				4.5	2.4	5.5	18.1	13.1	0.72	1.20	22.2	15.1	25.3	1.35	20.6	104.2	5.38
			85	2.3	0.4	1.0	16.2	12.2	0.75	1.41	21.0	11.5	24.4	1.35	19.8	103.0	5.23
				3.4	1.2	2.7	17.0	12.6	0.74	1.32	21.5	13.0	25.6	1.36	21.0	104.7	5.44
				4.5	2.3	5.3	17.4	12.8	0.73	1.27	21.7	13.8	26.3	1.36	21.6	105.5	5.56
			90	2.3	0.4	0.9	15.5	11.9	0.77	1.48	20.5	10.5	25.4	1.36	20.8	104.4	5.41
				3.4	1.2	2.7	16.3	12.3	0.75	1.39	21.1	11.8	26.7	1.37	21.9	106.0	5.62
				4.5	2.3	5.2	16.8	12.5	0.74	1.34	21.3	12.5	27.3	1.37	22.5	106.9	5.73
			100	2.3	0.4	0.9	14.1	11.2	0.80	1.63	19.7	8.6	Operation Not Recommended				
				3.4	1.2	2.7	14.9	11.6	0.78	1.54	20.2	9.7					
				4.5	2.2	5.0	15.4	11.8	0.77	1.50	20.4	10.3					
			110	2.3	0.4	0.9	12.7	10.6	0.83	1.79	18.8	7.1					
				3.4	1.1	2.6	13.5	11.0	0.81	1.70	19.3	8.0					
				4.5	2.1	4.9	13.9	11.2	0.80	1.65	19.6	8.4					
			120	2.3	0.4	0.9	11.4	10.1	0.88	1.95	18.1	5.9					
				3.4	1.1	2.6	12.1	10.4	0.86	1.86	18.5	6.5					
				4.5	2.1	4.9	12.5	10.5	0.84	1.82	18.7	6.9					

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded area.



## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

Performance Data  
TRM24

850 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, TRM24 (Cv = 10.3, MOPD = 125 psi)			EWT °F	GPM	WPD*		Cooling - EAT 80/67°F						Heating - EAT 70°F				
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP
			20	6.0	5.7	13.2	Operation Not Recommended						14.1	1.58	8.8	85.3	2.61
GPM	WPD Adder		30	3.0	1.3	3.1	28.4	19.6	0.69	1.06	31.9	26.7	15.9	1.59	10.6	87.3	2.93
	PSI	FT		4.5	2.4	5.4	27.9	18.8	0.67	1.00	31.1	28.0	16.6	1.60	11.2	88.1	3.04
3.0	0.42	0.97		6.0	4.6	10.5	27.4	18.2	0.67	0.97	30.6	28.4	17.0	1.60	11.6	88.5	3.11
4.5	1.02	2.36	40	3.0	1.2	2.8	28.4	20.0	0.71	1.17	32.2	24.3	18.7	1.62	13.3	90.4	3.38
6.0	1.96	4.53		4.5	2.2	5.1	28.5	19.8	0.69	1.09	32.1	26.0	19.7	1.64	14.1	91.4	3.52
				6.0	4.3	9.8	28.4	19.5	0.69	1.06	31.9	26.8	20.2	1.65	14.6	92.0	3.59
			50	3.0	1.2	2.7	27.6	19.8	0.72	1.29	31.9	21.4	21.7	1.67	16.1	93.6	3.80
				4.5	2.1	4.6	28.2	20.0	0.71	1.20	32.2	23.4	22.9	1.69	17.2	94.9	3.96
				6.0	4.1	9.4	28.4	20.0	0.70	1.16	32.2	24.4	23.6	1.71	17.8	95.7	4.04
			60	3.0	1.1	2.5	26.3	19.2	0.73	1.43	31.1	18.5	24.8	1.73	19.0	97.0	4.19
				4.5	1.9	4.3	27.2	19.7	0.72	1.33	31.7	20.5	26.3	1.77	20.3	98.6	4.36
				6.0	3.7	8.5	27.6	19.8	0.72	1.28	31.9	21.6	27.1	1.78	21.0	99.5	4.45
			70	3.0	1.1	2.4	24.7	18.4	0.75	1.58	30.0	15.6	28.0	1.81	21.9	100.5	4.54
				4.5	1.8	4.2	25.8	19.0	0.74	1.48	30.8	17.5	29.7	1.85	23.4	102.3	4.71
				6.0	3.6	8.3	26.4	19.2	0.73	1.42	31.1	18.5	30.6	1.87	24.3	103.4	4.80
			80	3.0	1.0	2.3	22.8	17.5	0.77	1.77	28.8	12.9	31.2	1.88	24.8	104.0	4.85
				4.5	1.7	3.9	24.1	18.1	0.75	1.65	29.6	14.6	33.1	1.93	26.5	106.0	5.01
				6.0	3.3	7.7	24.7	18.4	0.75	1.59	30.0	15.5	34.1	1.96	27.5	107.2	5.10
			85	3.0	1.0	2.2	21.8	17.0	0.78	1.88	28.2	11.7	32.8	1.93	26.2	105.7	4.98
				4.5	1.6	3.8	23.1	17.6	0.76	1.75	29.0	13.3	34.7	1.98	28.0	107.8	5.14
				6.0	3.3	7.6	23.7	17.9	0.76	1.68	29.4	14.2	35.8	2.01	29.0	109.0	5.22
			90	3.0	1.0	2.2	20.8	16.5	0.79	1.99	27.6	10.5	34.3	1.97	27.7	107.4	5.11
				4.5	1.6	3.7	22.1	17.1	0.77	1.85	28.3	12.0	36.4	2.03	29.5	109.7	5.27
				6.0	3.3	7.5	22.7	17.4	0.77	1.78	28.7	12.8	37.5	2.06	30.5	110.9	5.35
			100	3.0	0.9	2.1	18.8	15.6	0.83	2.24	26.4	8.4	Operation Not Recommended				
				4.5	1.6	3.6	20.0	16.2	0.81	2.08	27.1	9.6					
				6.0	3.0	6.9	20.6	16.4	0.80	2.01	27.5	10.3					
			110	3.0	0.9	2.0	16.9	14.9	0.88	2.53	25.6	6.7					
				4.5	1.5	3.5	18.0	15.3	0.85	2.36	26.0	7.6					
				6.0	3.0	6.9	18.6	15.5	0.84	2.27	26.3	8.2					
			120	3.0	0.9	2.0	15.2	14.4	0.95	2.88	25.1	5.3					
				4.5	1.5	3.5	16.1	14.6	0.91	2.68	25.3	6.0					
				6.0	3.0	6.8	16.6	14.8	0.89	2.59	25.4	6.4					

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded area.

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

Performance Data  
TRM30

1140 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, TRM30 (Cv = 10.3, MOPD = 125 psi)			EWT °F	GPM	WPD*		Cooling - EAT 80/67°F						Heating - EAT 70°F				
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP
			20	7.5	5.6	13.0	Operation Not Recommended						16.8	1.82	10.8	83.7	2.71
GPM	WPD Adder		30	3.8	1.0	2.2	32.8	20.8	0.63	1.34	35.5	23.1	19.1	1.85	12.9	85.5	3.03
	PSI	FT		5.6	2.9	6.8	32.1	20.6	0.64	1.28	34.6	23.8	19.9	1.86	13.7	86.2	3.15
3.8	0.67	1.55	40	7.5	5.5	12.7	31.7	20.5	0.65	1.24	34.1	24.1	20.4	1.86	14.1	86.6	3.21
5.6	1.58	3.65		3.8	0.9	2.1	33.3	20.9	0.63	1.46	36.3	21.6	22.4	1.89	16.1	88.2	3.49
7.5	3.06	7.07	50	5.6	2.9	6.6	33.0	20.8	0.63	1.38	35.9	22.6	23.5	1.90	17.1	89.1	3.62
				7.5	5.4	12.5	32.8	20.8	0.63	1.35	35.5	23.0	24.1	1.91	17.6	89.5	3.70
			60	3.8	0.9	2.1	33.1	21.1	0.64	1.58	36.6	19.8	25.8	1.93	19.3	90.9	3.92
				5.6	2.8	6.5	33.3	21.0	0.63	1.50	36.5	21.0	27.0	1.94	20.4	91.9	4.07
			70	7.5	5.3	12.2	33.3	20.9	0.63	1.46	36.4	21.5	27.6	1.95	21.1	92.4	4.15
				3.8	0.8	1.8	32.4	21.0	0.65	1.72	36.5	17.8	29.0	1.97	22.3	93.5	4.31
			80	5.6	2.4	5.6	32.9	21.1	0.64	1.63	36.6	19.1	30.2	1.99	23.5	94.6	4.46
				7.5	4.5	10.5	33.1	21.1	0.64	1.59	36.6	19.8	30.9	1.99	24.2	95.1	4.54
			90	3.8	0.8	1.8	31.3	20.8	0.67	1.89	35.9	15.7	31.8	2.01	25.0	95.9	4.65
				5.6	2.4	5.4	32.1	21.0	0.65	1.78	36.3	17.0	33.0	2.02	26.2	96.8	4.78
			100	7.5	4.4	10.2	32.4	21.0	0.65	1.73	36.5	17.7	33.6	2.03	26.7	97.3	4.85
				3.8	0.7	1.5	29.6	20.3	0.69	2.08	35.1	13.4	34.2	2.04	27.3	97.8	4.91
			110	5.6	2.0	4.7	30.7	20.7	0.67	1.96	35.7	14.8	35.1	2.05	28.1	98.5	5.01
				7.5	3.8	8.9	31.2	20.8	0.67	1.90	35.9	15.5	35.4	2.06	28.5	98.8	5.04
			120	3.8	0.6	1.4	28.6	19.9	0.70	2.20	34.5	12.4	34.9	2.05	28.0	98.4	4.99
				5.6	2.0	4.6	29.8	20.3	0.68	2.06	35.2	13.7	35.6	2.06	28.6	98.9	5.05
			130	7.5	3.7	8.6	30.3	20.5	0.68	2.00	35.4	14.4	35.8	2.07	28.8	99.1	5.07
				3.8	0.6	1.4	27.6	19.4	0.71	2.31	33.9	11.3	35.7	2.06	28.7	99.0	5.07
			140	5.6	1.9	4.5	28.9	20.0	0.69	2.17	34.7	12.6	36.1	2.07	29.0	99.3	5.10
				7.5	3.6	8.4	29.5	20.2	0.69	2.10	35.0	13.3	36.1	2.07	29.1	99.3	5.10
			150	3.8	0.6	1.4	25.1	18.2	0.72	2.58	32.5	9.2	Operation Not Recommended				
				5.6	1.9	4.3	26.6	19.0	0.71	2.42	33.4	10.4					
			7.5	3.5	8.1	27.3	19.3	0.71	2.34	33.8	11.0						
			160	3.8	0.6	1.4	22.3	16.5	0.74	2.90	31.0	7.3					
				5.6	1.8	4.1	23.9	17.5	0.73	2.72	31.9	8.3					
			7.5	3.5	8.1	24.7	18.0	0.73	2.63	32.3	8.9						
			170	3.8	0.6	1.4	19.1	14.4	0.75	3.26	29.2	5.5					
				5.6	1.8	4.1	20.8	15.6	0.75	3.06	30.2	6.4					
			7.5	3.4	7.8	21.7	16.1	0.74	2.96	30.6	6.9						

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded area.

# Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## Performance Data TRM36

1260 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, TRM36 (Cv = 10.3, MOPD = 125 psi)			EWT °F	GPM	WPD*		Cooling - EAT 80/67°F						Heating - EAT 70°F					
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP	
			20	9.0	9.8	22.7	Operation Not Recommended						20.6	2.16	13.3	85.1	2.78	
GPM	WPD Adder		30	4.5	2.5	5.8	39.9	25.1	0.63	1.56	45.1	25.5	23.0	2.20	15.6	86.9	3.06	
	PSI	FT		6.8	5.2	11.9	39.7	24.2	0.61	1.48	44.6	26.8	23.9	2.21	16.5	87.6	3.16	
4.5	0.93	2.15		9.0	8.6	19.9	39.4	23.5	0.60	1.44	44.1	27.3	24.4	2.22	17.0	87.9	3.22	
6.8	2.32	5.36	40	4.5	2.4	5.4	39.6	25.6	0.65	1.70	45.2	23.2	26.7	2.26	19.2	89.6	3.47	
9.0	4.40	10.20		6.8	4.8	11.2	39.9	25.3	0.64	1.61	45.2	24.8	27.9	2.27	20.3	90.5	3.60	
				9.0	8.1	18.7	39.9	25.1	0.63	1.57	45.1	25.5	28.5	2.28	20.9	91.0	3.67	
			50	4.5	2.1	4.9	38.5	25.4	0.66	1.86	44.7	20.7	30.6	2.31	22.8	92.5	3.88	
				6.8	4.4	10.2	39.3	25.6	0.65	1.76	45.1	22.4	32.0	2.33	24.2	93.5	4.02	
				9.0	7.4	17.0	39.5	25.6	0.65	1.71	45.2	23.2	32.8	2.34	24.9	94.1	4.10	
			60	4.5	2.0	4.6	36.9	24.8	0.67	2.05	43.8	18.0	34.5	2.37	26.5	95.3	4.27	
				6.8	4.1	9.4	38.0	25.2	0.66	1.92	44.4	19.7	36.1	2.39	28.0	96.5	4.42	
				9.0	6.8	15.7	38.5	25.4	0.66	1.87	44.7	20.6	37.0	2.41	28.9	97.2	4.50	
			70	4.5	1.9	4.5	34.9	23.8	0.68	2.26	42.5	15.5	38.3	2.43	30.1	98.2	4.62	
				6.8	4.0	9.2	36.2	24.4	0.67	2.12	43.3	17.1	40.1	2.46	31.8	99.5	4.78	
				9.0	6.6	15.3	36.8	24.7	0.67	2.05	43.7	17.9	41.1	2.48	32.7	100.2	4.86	
			80	4.5	1.8	4.1	32.7	22.8	0.70	2.51	41.2	13.1	42.0	2.49	33.6	100.9	4.94	
				6.8	3.7	8.5	34.1	23.4	0.69	2.35	42.0	14.5	43.9	2.53	35.3	102.3	5.09	
				9.0	6.2	14.2	34.8	23.7	0.68	2.27	42.4	15.3	44.9	2.55	36.2	103.0	5.16	
			85	4.5	1.8	4.0	31.6	22.2	0.70	2.65	40.5	12.0	43.8	2.53	35.2	102.2	5.07	
				6.8	3.8	8.8	33.0	22.9	0.69	2.48	41.3	13.3	45.6	2.56	36.9	103.5	5.21	
				9.0	6.0	13.9	33.6	23.2	0.69	2.40	41.8	14.1	46.5	2.58	37.8	104.2	5.28	
			90	4.5	1.7	4.0	30.4	21.7	0.71	2.79	39.9	10.9	45.5	2.56	36.8	103.4	5.21	
				6.8	4.0	9.1	31.8	22.3	0.70	2.62	40.6	12.1	47.3	2.60	38.5	104.7	5.33	
				9.0	5.9	13.6	32.5	22.6	0.70	2.53	41.1	12.8	48.2	2.62	39.3	105.4	5.39	
			100	4.5	1.7	3.8	28.0	20.8	0.74	3.13	38.7	8.9	Operation Not Recommended					
				6.8	3.4	7.9	29.4	21.3	0.73	2.93	39.3	10.0						
				9.0	5.7	13.2	30.1	21.6	0.72	2.84	39.7	10.6						
			110	4.5	1.6	3.8	25.8	20.2	0.78	3.53	37.8	7.3						
				6.8	3.4	7.7	27.0	20.5	0.76	3.30	38.3	8.2						
				9.0	5.6	13.0	27.7	20.7	0.75	3.19	38.5	8.7						
			120	4.5	1.6	3.7	23.8	20.0	0.84	4.00	37.4	5.9						
				6.8	3.3	7.7	24.8	20.1	0.81	3.73	37.6	6.7						
				9.0	5.6	12.9	25.4	20.1	0.79	3.61	37.7	7.1						

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded area.

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## Performance Data Correction Tables

### Air Flow Correction Table

Airflow	Cooling				Heating		
% of Rated	Total Capacity	Sensible Capacity	Power	Heat of Rejection	Heating Capacity	Power	Heat of Extraction
70%	0.921	0.800	0.969	0.943	0.942	1.077	0.934
75%	0.934	0.833	0.974	0.952	0.952	1.062	0.947
80%	0.946	0.866	0.979	0.961	0.961	1.048	0.958
85%	0.958	0.899	0.985	0.970	0.971	1.035	0.969
90%	0.971	0.932	0.990	0.979	0.980	1.023	0.979
95%	0.985	0.966	0.995	0.989	0.990	1.011	0.989
100%	1.000	1.000	1.000	1.000	1.000	1.000	1.000
105%	1.017	1.035	1.005	1.013	1.010	0.989	1.011

### Entering Air Correction Table

Heating			
Entering Air DB°F	Heating Capacity	Power	Heat of Extraction
45	1.107	0.768	1.181
50	1.085	0.814	1.143
55	1.064	0.860	1.108
60	1.043	0.906	1.072
65	1.022	0.952	1.036
68	1.009	0.981	1.015
70	1.000	1.000	1.000
75	0.982	1.050	0.962
80	0.953	1.103	0.921

Cooling										
Entering Air WB°F	Total Capacity	Sensible Cooling Capacity Multiplier - Entering DB °F							Power	Heat of Rejection
		70	75	80	80.6	85	90	95		
60	0.851	0.854	1.091	1.325	1.385	*	*	*	0.996	0.896
65	0.957	0.617	0.857	1.093	1.152	1.326	*	*	0.999	0.970
66.2	0.983	0.561	0.801	1.037	1.097	1.270	1.520	*	1.000	0.988
67	1.000	0.523	0.763	1.000	1.059	1.232	1.482	*	1.000	1.000
70	1.064		0.623	0.861	0.920	1.090	1.339	1.563	1.002	1.045
75	1.171			0.629	0.688	0.854	1.101	1.318	1.005	1.119

\* = Sensible capacity equals total capacity  
ARI/ISO/ASHRAE 13256-1 uses entering air conditions of Cooling - 80.6°F DB/66.2°F WB, 1

\* = Sensible capacity equals total capacity

ARI/ISO/ASHRAE 13256-1 uses entering air conditions of Cooling - 80.6°F DB/66.2°F WB, 1 and Heating - 68°F DB/59°F WB entering air temperature

**Antifreeze Correction Table**

Antifreeze Type	Antifreeze %	Cooling			Heating		WPD Corr. Fct. EWT 30°F
		EWT 90°F			EWT 30°F		
		Total Cap	Sens Cap	Power	Htg Cap	Power	
Water	0	1.000	1.000	1.000	1.000	1.000	1.000
Propylene Glycol	5	0.995	0.995	1.003	0.989	0.997	1.070
	15	0.986	0.986	1.009	0.968	0.990	1.210
	25	0.978	0.978	1.014	0.947	0.983	1.360
Methanol	5	0.997	0.997	1.002	0.989	0.997	1.070
	15	0.990	0.990	1.007	0.968	0.990	1.160
	25	0.982	0.982	1.012	0.949	0.984	1.220
Ethanol	5	0.998	0.998	1.002	0.981	0.994	1.140
	15	0.994	0.994	1.005	0.944	0.983	1.300
	25	0.986	0.986	1.009	0.917	0.974	1.360
Ethylene Glycol	5	0.998	0.998	1.002	0.993	0.998	1.040
	15	0.994	0.994	1.004	0.980	0.994	1.120
	25	0.988	0.988	1.008	0.966	0.990	1.200

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## Blower Performance Data

Airflow in CFM with wet coil and clean air filter.

Model	Fan Speed	Rated Airflow	Min CFM	Airflow (cfm) at External Static Pressure (in. wg)															
				0.00	0.01	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70
TRM09	HI	405	284	408	403	376	346	319	292										
	LOW			349	343	320	296												
TRM12	HI	445	312	445	434	409	378	349	320										
	LOW			345	341	325													
TRM15	HI	595	416	689	686	672	664	652	642	633	618	605	590	568	539	511	477		
	MED			595	593	576	564	554	544	534	525	509	493	447	427				
	LOW			519	516	505	487	475	449	437	423								
TRM18	HI	685	480	685	682	674	664	653	640	627	612	594	575	553	528	500			
	MED			591	589	581	572	562	552	541	529	515	498	480					
	LOW			514	511	503	492	482											
TRM24	HI	850	596	850	845	830	808	783	785	730	703	672	641	611					
	MED			761	749	727	707	679	655	628	602								
	LOW			653	648	630	610	596											
TRM30	HI	1140	798	1346	1340	1310	1284	1221	1172	1135	1108	1069	1036	996	959	910	864		
	MED			1140	1130	1113	1101	1077	1056	1030	1010	979	952	917	886	840	798		
	LOW			1008	996	980	968	949	934	914	897	870	846	810					
TRM36	HI	1260	882	1262	1259	1234	1209	1180	1153	1122	1091	1057	1024	989	954	913			
	MED			1129	1125	1107	1090	1068	1046	1020	996	965	935	901					
	LOW			1010	1007	995	980	962	940	938	916	893							

Units factory shipped on high speed. Other speed required field selection.

All airflow is rated at lowest Voltage if unit is dual Voltage rated, i.e. 208V for 208-230V units.

All units ARI/ISO/ASHRAE 13256-1 rated on high fan speed.



## Physical Data

Model	09	12	15	18	24	30	36
Compressor (1 Each)	Rotary				Scroll		
Factory Charge R410A (oz) [kg]	33.5 [0.95]	35 [0.99]	43 [1.22]	48.5 [1.38]	71 [2.01]	75 [2.13]	75 [2.13]
<b>PSC Fan Motor &amp; Blower (2 Speeds)</b>							
Fan Motor (hp) [W]	1/30 [25]	1/15 [50]	1/6 [124]	1/6 [124]	1/5 [149]	1/2 [373]	1/2 [373]
Blower Wheel Size (dia x w) - (in) [mm]	6.75 x 7.25 [174 x 184]	6.75 x 7.25 [174 x 184]	9.50 x 7.12 [241 x 181]	9.50 x 7.12 [241 x 181]	9.50 x 7.12 [241 x 181]	9.50 x 8.06 [241 x 205]	9.50 x 8.06 [241 x 205]
<b>Hose Kit (AHH Series Required)</b>							
IPT (in)	1/2	1/2	3/4	3/4	1	1	1
<b>Chassis Air Coil</b>							
Air Coil Dimensions (h x w) - (in) [mm]	22 x 11.5 [559 x 292]	22 x 11.5 [559 x 292]	28 x 14 [711 x 356]	28 x 14 [711 x 356]	30 x 18 [762 x 457]	30 x 18 [762 x 457]	30 x 18 [762 x 457]
Standard Filter - 1" [25.4mm] Throwaway, qty (in) [mm]	14 x 24 [356 x 610]	14 x 24 [356 x 610]	16 x 30 [406 x 762]	16 x 30 [406 x 762]	20 x 32 [508 x 813]	20 x 32 [508 x 813]	20 x 32 [508 x 813]
<b>Weight</b>							
Chassis - (lbs) [kg]	90 [41]	97 [44]	115 [52]	115 [52]	176 [80]	182 [83]	182 [83]
Cabinet - (lbs) [kg]	174 [79]	174 [79]	189 [86]	189 [86]	243 [110]	243 [110]	243 [110]


## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

## Electrical Data

Model	Voltage Code	Voltage	Min/Max Voltage	Compressor		Fan Motor FLA	Standard Units			Units with Secondary Loop Pump		
				RLA	LRA		Total Unit FLA	Min Circuit Amps	Max Fuse/HACR	Total Unit FLA	Min Circuit Amps	Max Fuse/HACR
TRM09	G	208-230/60/1	197/254	4.5	23.0	0.31	4.8	5.9	15	5.2	6.3	15
TRM12	G	208-230/60/1	197/254	5.3	30.0	0.70	6.0	7.4	15	6.4	7.8	15
TRM15	G	208-230/60/1	197/254	5.8	30.0	1.00	6.8	8.3	15	7.6	9.1	15
TRM18	G	208-230/60/1	197/254	6.8	38.0	1.0	7.8	9.5	15	8.6	10.3	15
TRM24	G	208-230/60/1	197/254	14.3	58.3	1.10	15.4	19.0	30	16.2	19.8	30
TRM30	G	208-230/60/1	197/254	14.3	64.0	1.80	16.1	19.7	30	16.9	20.5	30
TRM36	G	208-230/60/1	197/254	15.7	77.0	1.80	17.5	21.4	35	18.3	22.2	35

# Typical Wiring Diagram Single Phase TRM Units With CXM Controller

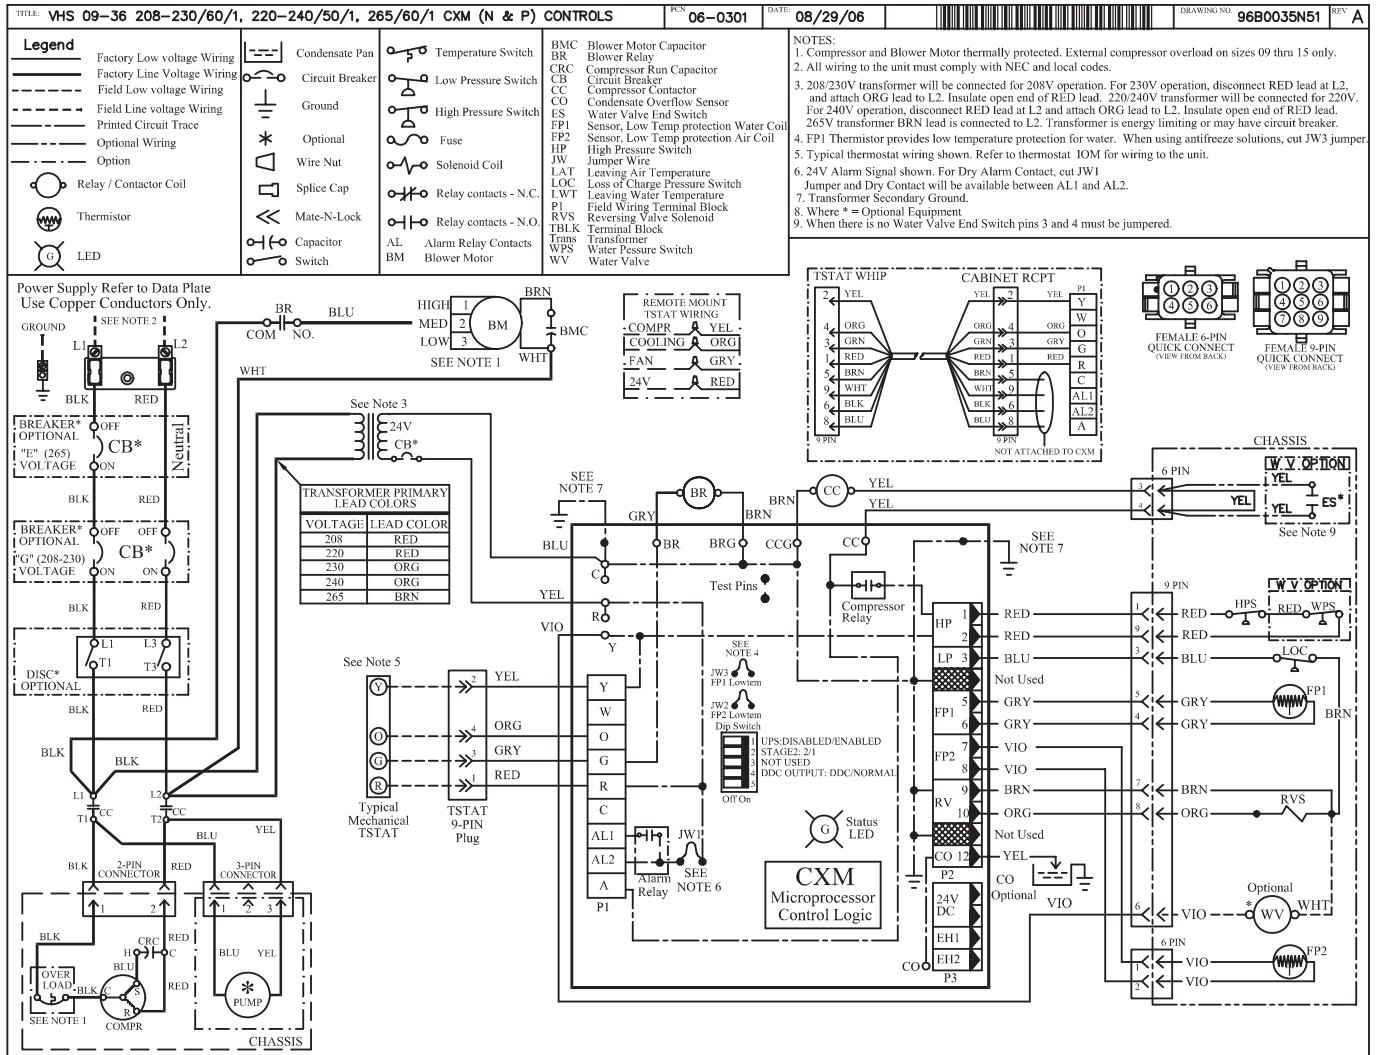


## CXM CONTROLLER FAULT CODES

DESCRIPTION OF OPERATION	LED	ALARM RELAY
NORMAL MODE	ON	OPEN
NORMAL MODE W/ UPS WARNING	ON	CYCLE (CLOSED 5 SEC. OPEN 25 SEC.)
CXM IS NON-FUNCTIONAL	OFF	OPEN
FAULT RETRY	SLOW FLASH	OPEN
LOCKOUT	FAST FLASH	CLOSED
OVER/UNDER VOLTAGE SHUTDOWN	SLOW FLASH	OPEN (CLOSED AFTER 15 MIN.)
TEST MODE-NO FAULT IN MEMORY	FLASHING CODE 1	CYCLING CODE 1
TEST MODE-HP FAULT IN MEMORY	FLASHING CODE 2	CYCLING CODE 2
TEST MODE-LP FAULT IN MEMORY	FLASHING CODE 3	CYCLING CODE 3
TEST MODE-FP1 FAULT IN MEMORY	FLASHING CODE 4	CYCLING CODE 4
TEST MODE-FP2-FAULT IN MEMORY	FLASHING CODE 5	CYCLING CODE 5
TEST MODE-CO FAULT IN MEMORY	FLASHING CODE 6	CYCLING CODE 6
TEST MODE-OVER/UNDER SHUTDOWN IN MEMORY	FLASHING CODE 7	CYCLING CODE 7
TEST MODE-UPS IN MEMORY	FLASHING CODE 8	CYCLING CODE 8
TEST MODE-SWAPPED FP1 TO FP2	FLASHING CODE 9	CYCLING CODE 9



**Typical Wiring Diagram  
Single Phase TRM Units  
With DXM Controller with  
Night Setback, Emergency Shutdown,  
& Pump Restart**

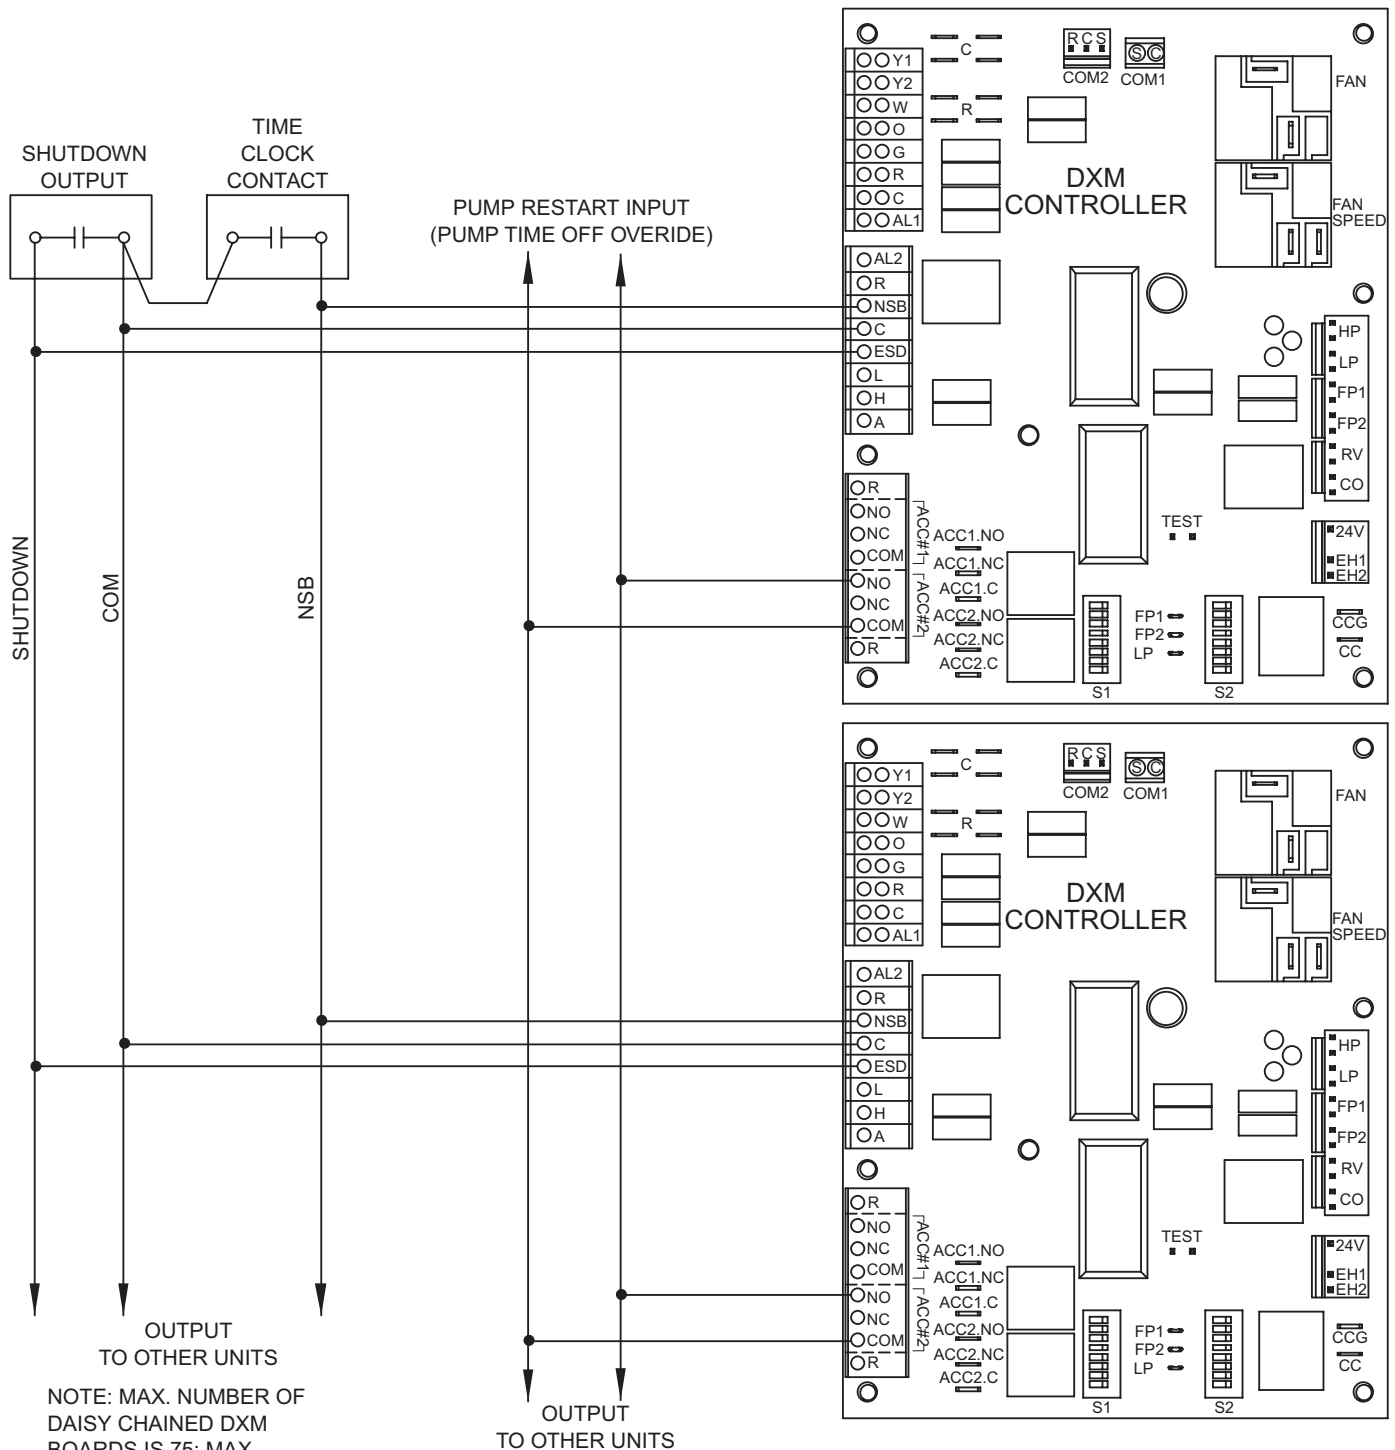


## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D


## Typical Unit - Exploded View

### Single Unit: Furred In & Ducted

- 1 816/TRM cabinet (furred-in)
- 2 Slide-in heating and cooling chassis
- 3 Architectural acoustic R/A panel with hinged center door
- 4 Factory installed supply, return and condensate risers
- 5 Factory installed drain pan with P-trap assembly
- 6 Factory installed supply and return feeders with ball valves
- 7 Blower and motor assembly
- 8 Top discharge duct collar for field supply air plenum
- 9 Conduit for control wiring
- 10 Conduit for line voltage wiring
- 11 Electr. & control compartment with (optional) disconnect
- 12 Factory installed base vibration dampening pad (optional)
- 13 Return air filter frame and filter
- 14 Chassis line voltage cord and plug assembly
- 15 Chassis supply and return water connections
- 16 Compressor acoustic enclosure
- 17 R/A panel filler & finishing frame (optional)
- 18 Condenser compartment
- 19 Typical drywall enclosure
- 20 Chassis slide rail assembly
- 21 AHH series hose kit (REQUIRED)

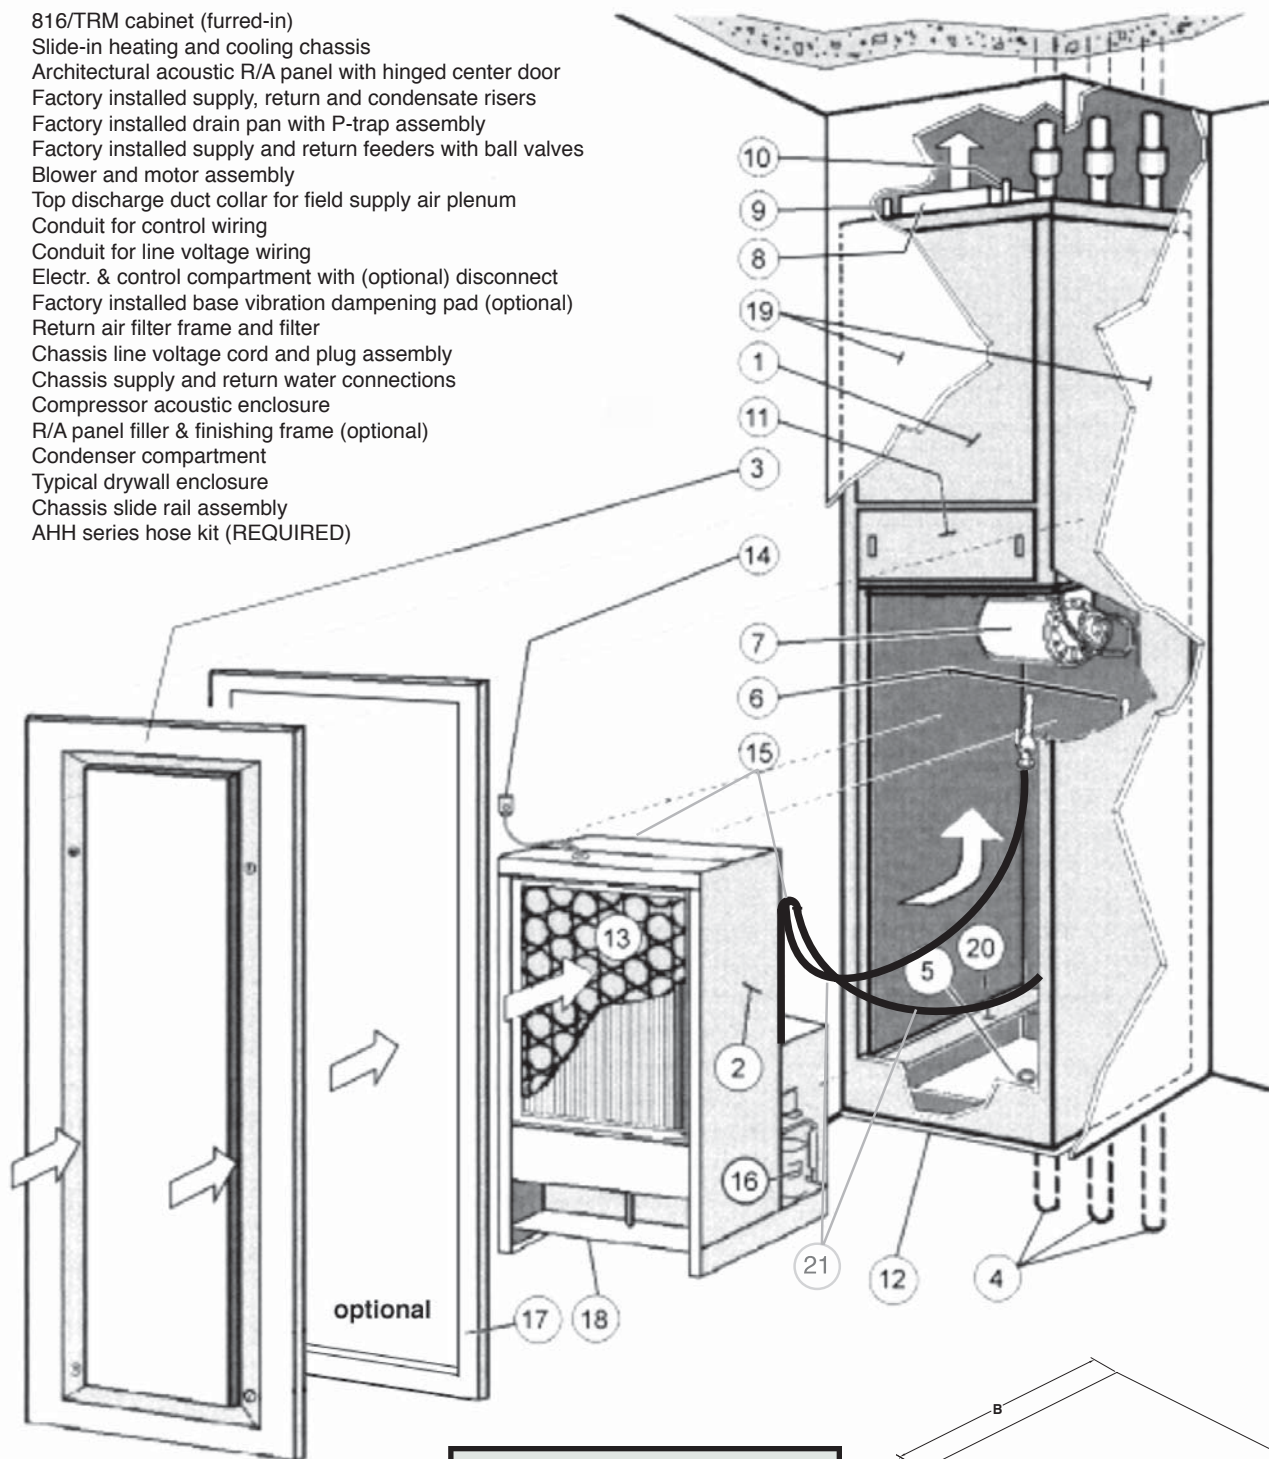

Optional Cabinet Stand		
Model	A	B
09/15	8" [203mm]	17.1" [434mm]
20	8" [203mm]	20.1" [511mm]
24-36	8" [203mm]	24.1" [612mm]

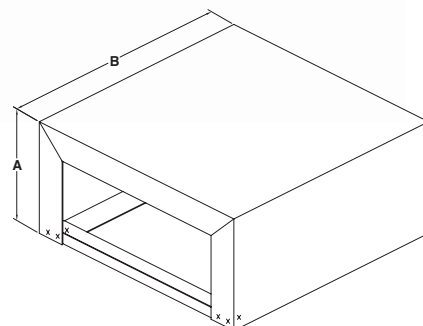




## AHH Series Stainless Steel Braided Hose Kit

### Specifications:


- Designed for water source heat pump applications.
- Kevlar® reinforced EPDM core with ANSI 302/304 stainless steel outer braid.
- Fire rated materials per ASTM E 84-00 (NFPA 255, ANSI/UL 723 & UBC 8-1).
- EPT (External Pipe Thread) fitting at one end; swivel connector with IPT (Internal Pipe Thread) at the other end (IPT connection via fiber or EPDM gasket, shipped inside connection).
- Swivel connection provides union between chassis and risers.
- Brass fittings, stainless steel ferrules.
- Temperature range of 35°F [2°C] to 180°F [82°C].
- Max. working pressure of 400 psi [2756 kPa].
- Min. burst pressure of four times working pressure.

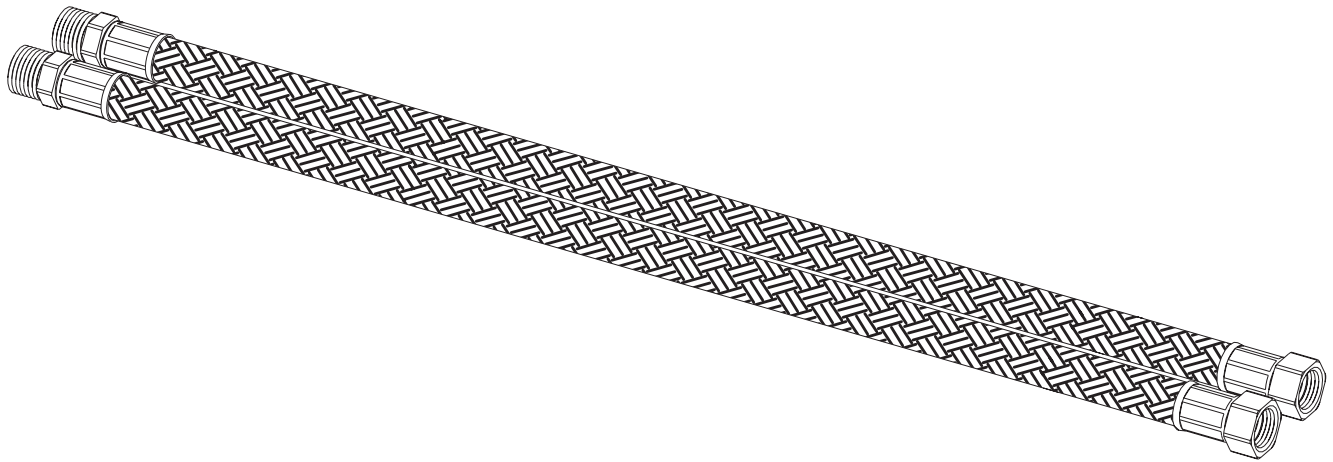

### Physical Data

Part #	Inside Diameter inches	Length feet [cm]	Working Pressure psi [kPa]	Min. Burst Pressure psi [kPa]	Min. Bend Radius inches [mm]
AHH0502B	0.50	2 [61]	400 [2756]	1600 [11024]	2.0 [50.8]
AHH0753B	0.75	3 [91]	400 [2756]	1600 [11024]	3.2 [81.3]
AHH1003B	1.00	3 [91]	350 [2413]	1600 [11024]	3.9 [99]

## Hinged "G" Style Return Air Panel

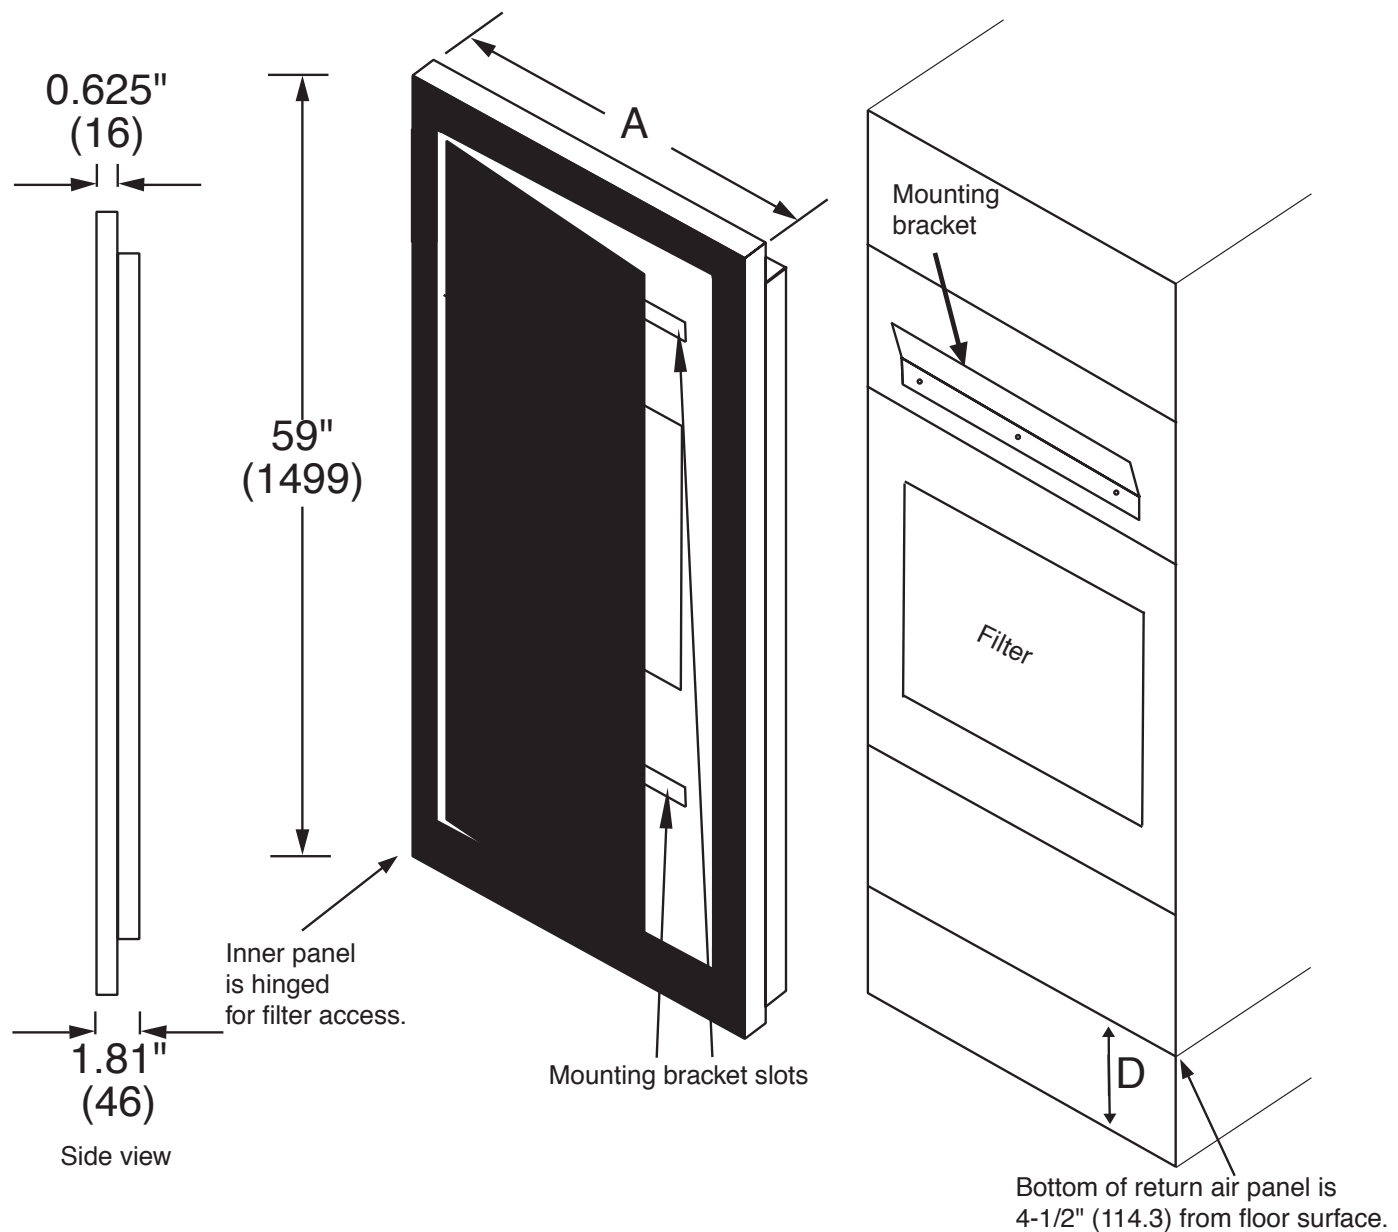



## Notes:

1. Panel Fits over mounting bracket for self alignment, then 4 bolts driven through panels slots into nuts on chassis.
2. Panel is painted Polar Ice White
3. All measurements are in inches, millimeters are in parenthesis.


Unit Size	A
09 - 12	18-1/2" [470]
15 - 18	21-1/2" [546]
24 - 36	25-1/2" [648]

1.25" (32) drywall flanges must be used on cabinet.

**Hinged "G" Style Return Air Panel  
With Keyed Locks**

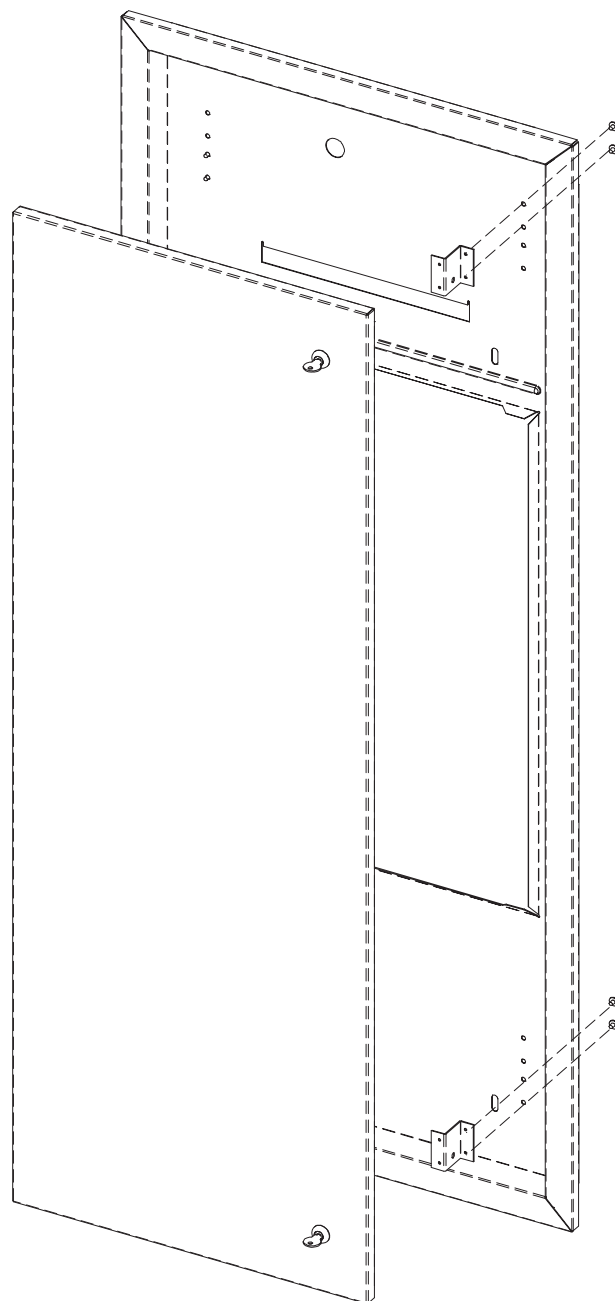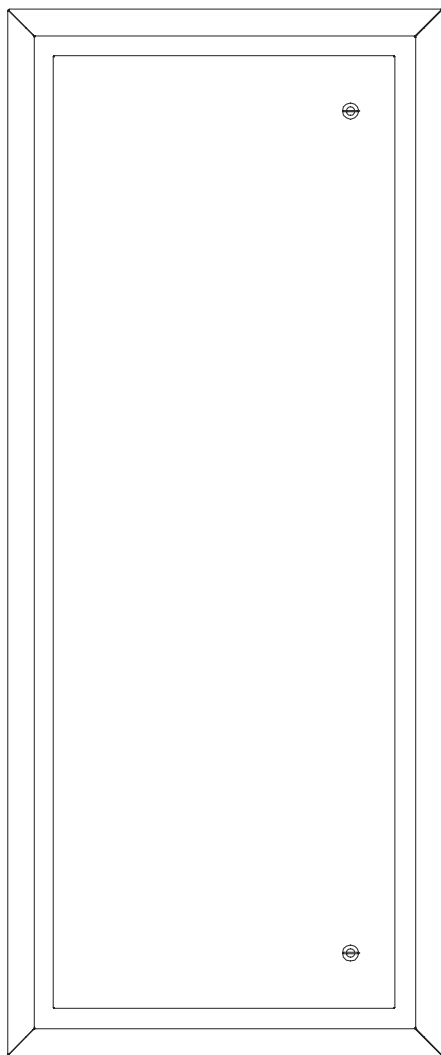


## Hinged "G" Style Return Air Panel

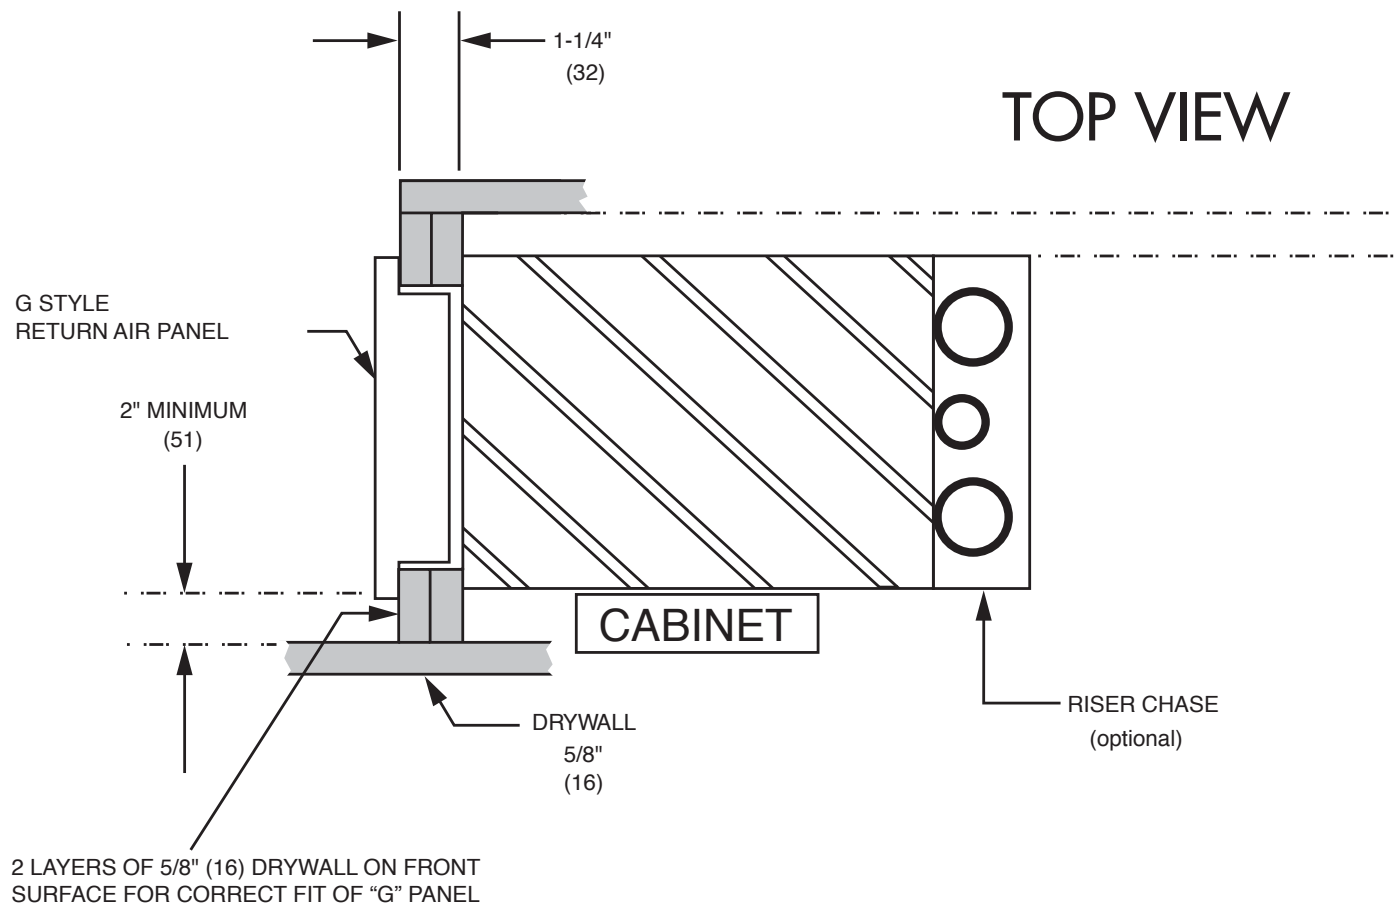

Drywall can be applied directly to unit surfaces, however, for best sound attenuation, a furred in stud wall installation is recommended.

**Note: All measurements are in inches, millimeters are in parenthesis.**

## Hinged "H" Style Return Air Panel

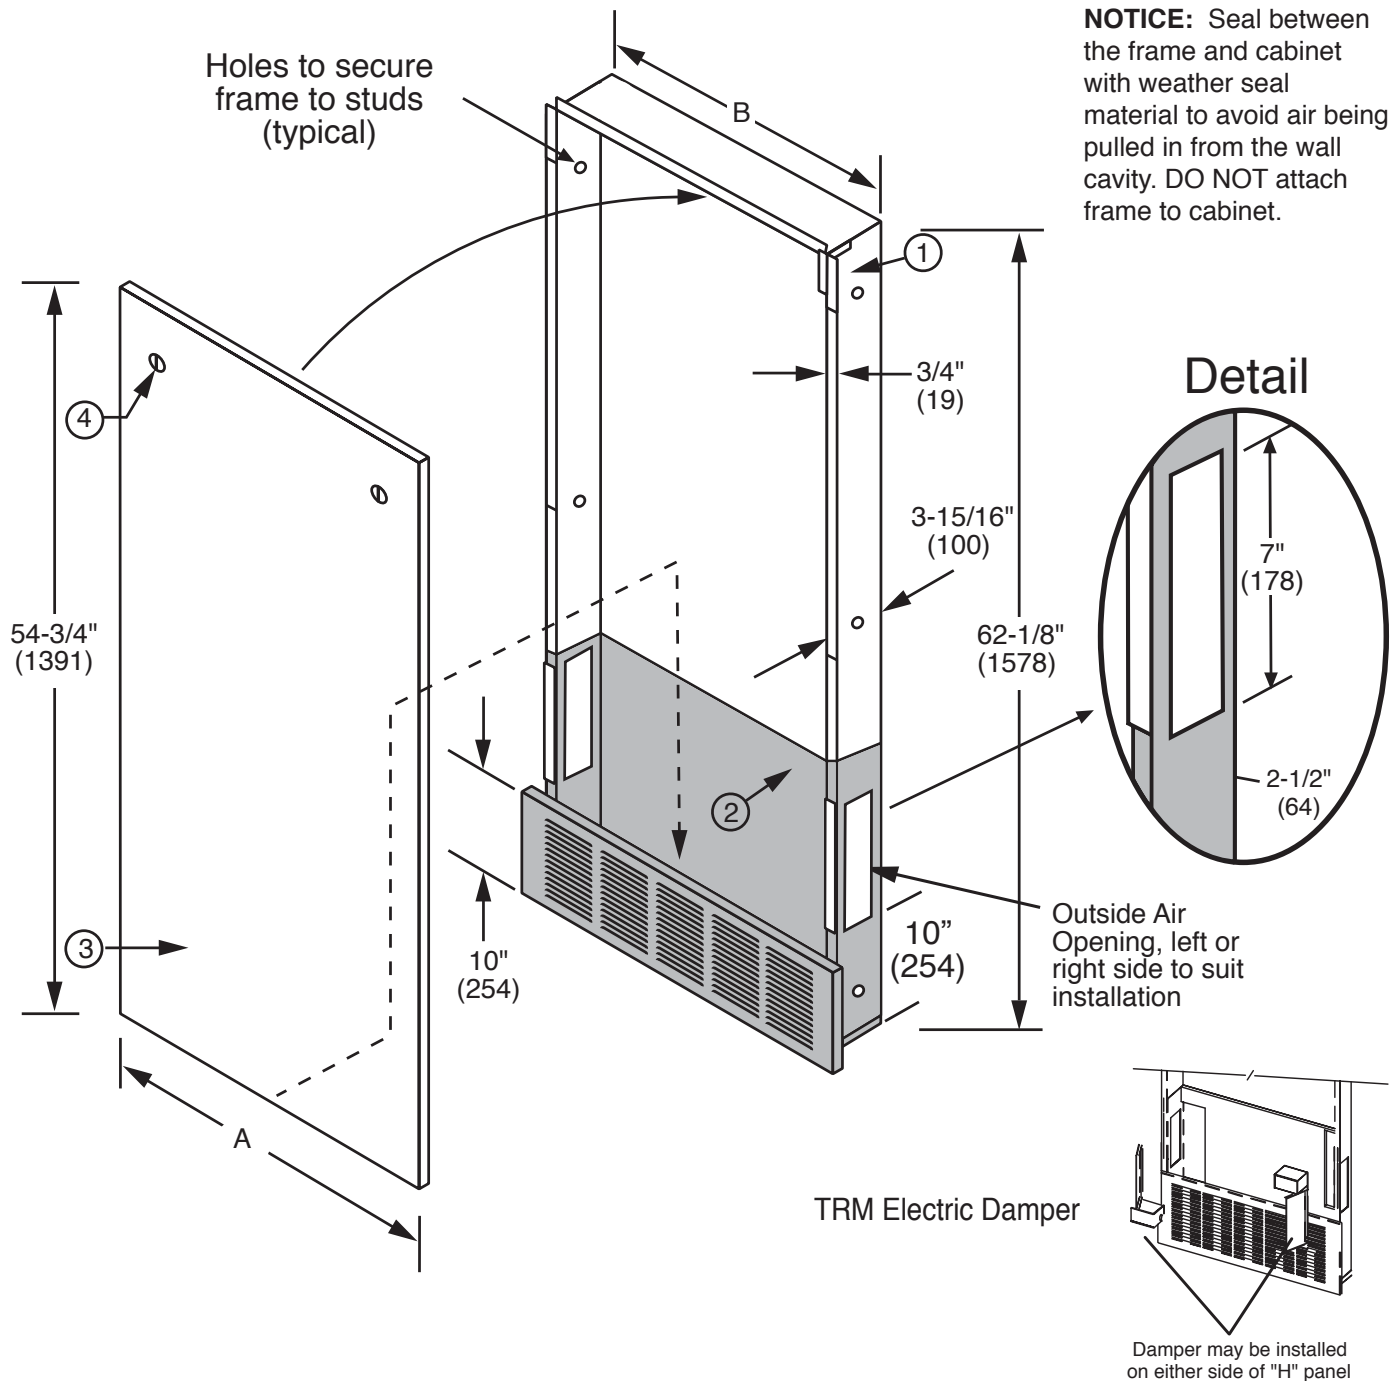

Notes: When outside air is used, contractor must supply outside air duct and cut hole in stud.

Item	QTY	Description
1	1	Frame assembly
2	1	Lower block-off assembly
3	1	Insulated front panel
4	2	1/4 turn fastener


Unit Size	A	B
09 - 12	18 5/8" [473]	16 3/4" [425]
15 - 18	21 5/8" [549]	19 3/4" [502]
24 - 36	25 5/8" [650]	23 3/4" [603]

**Note:** All measurements are in inches, millimeters are in parenthesis. Asy = Assembly

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D


## Hinged "H" Style Return Air Panel

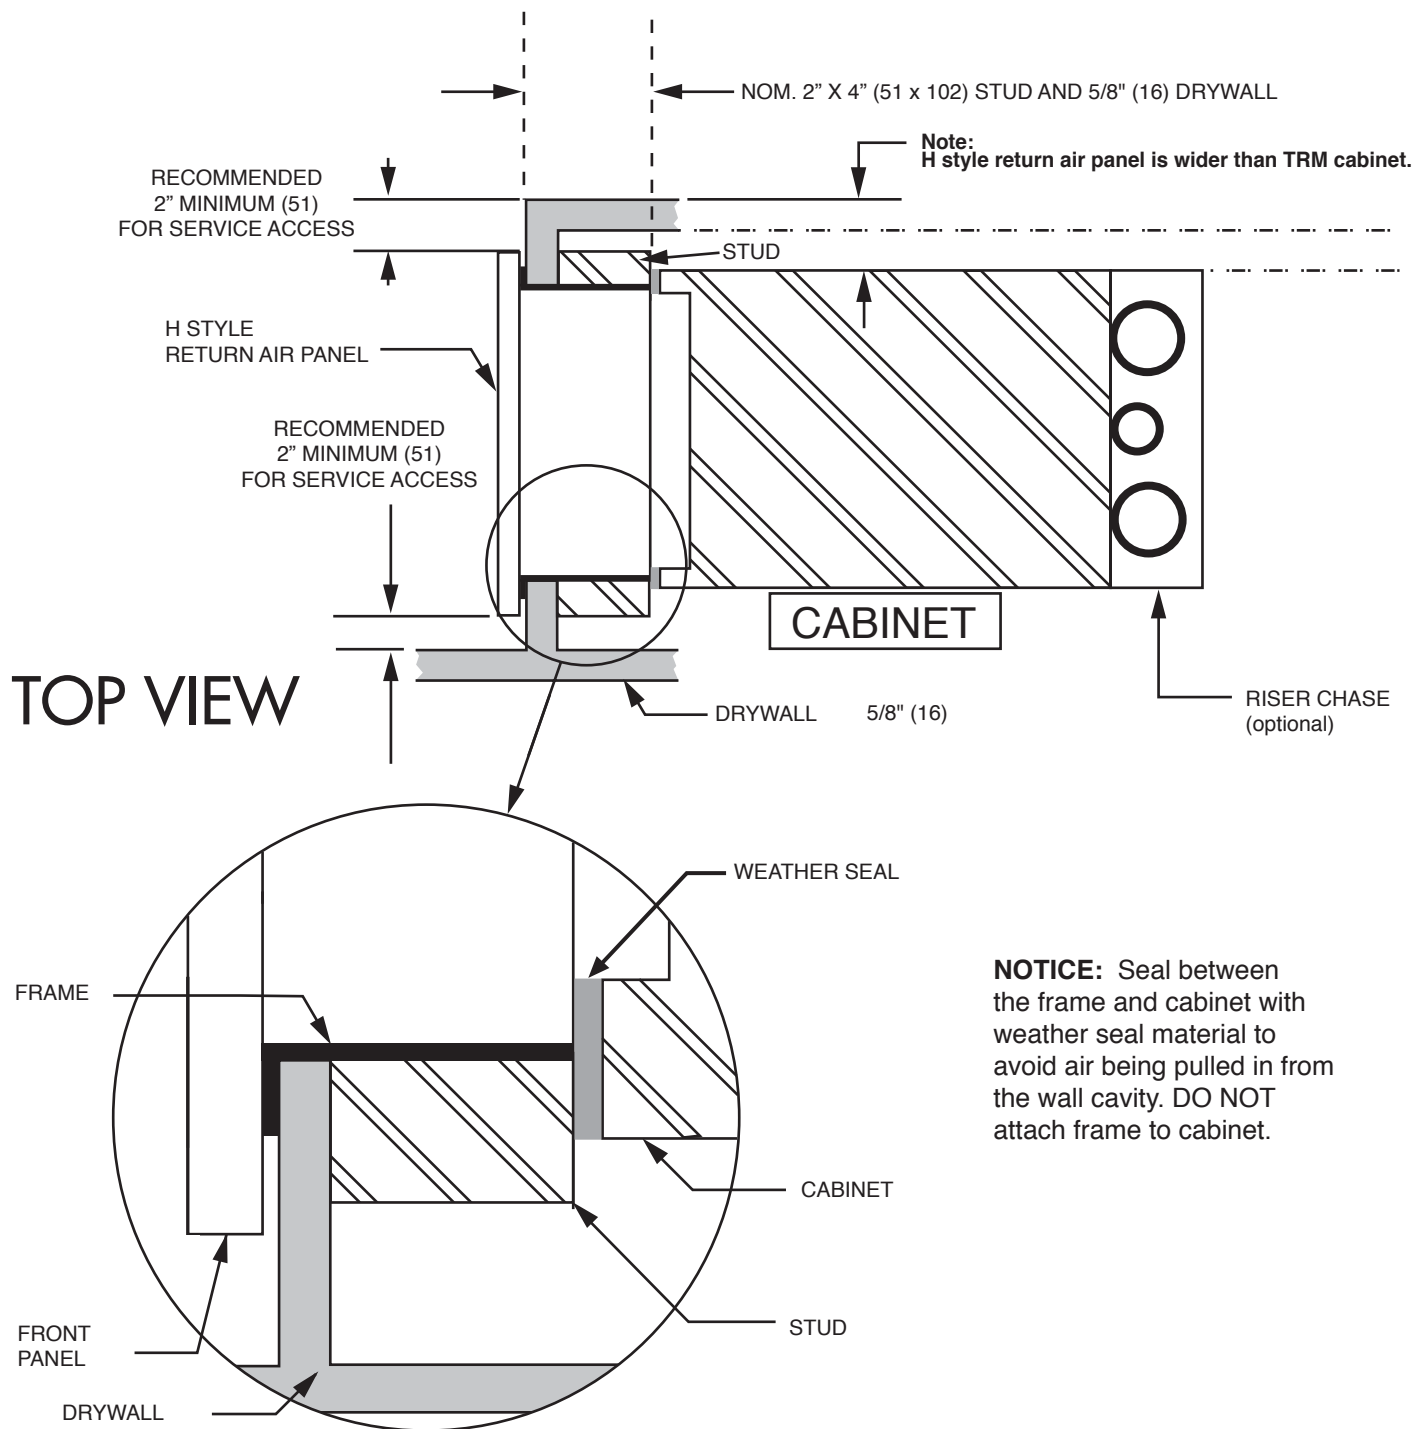

**Note:** All measurements are in inches, millimeters are in parenthesis.



**TRM Unit Dimensions**  
**Single Unit, Furred In Cabinet**  
**(88 in. [2235mm] Height)**

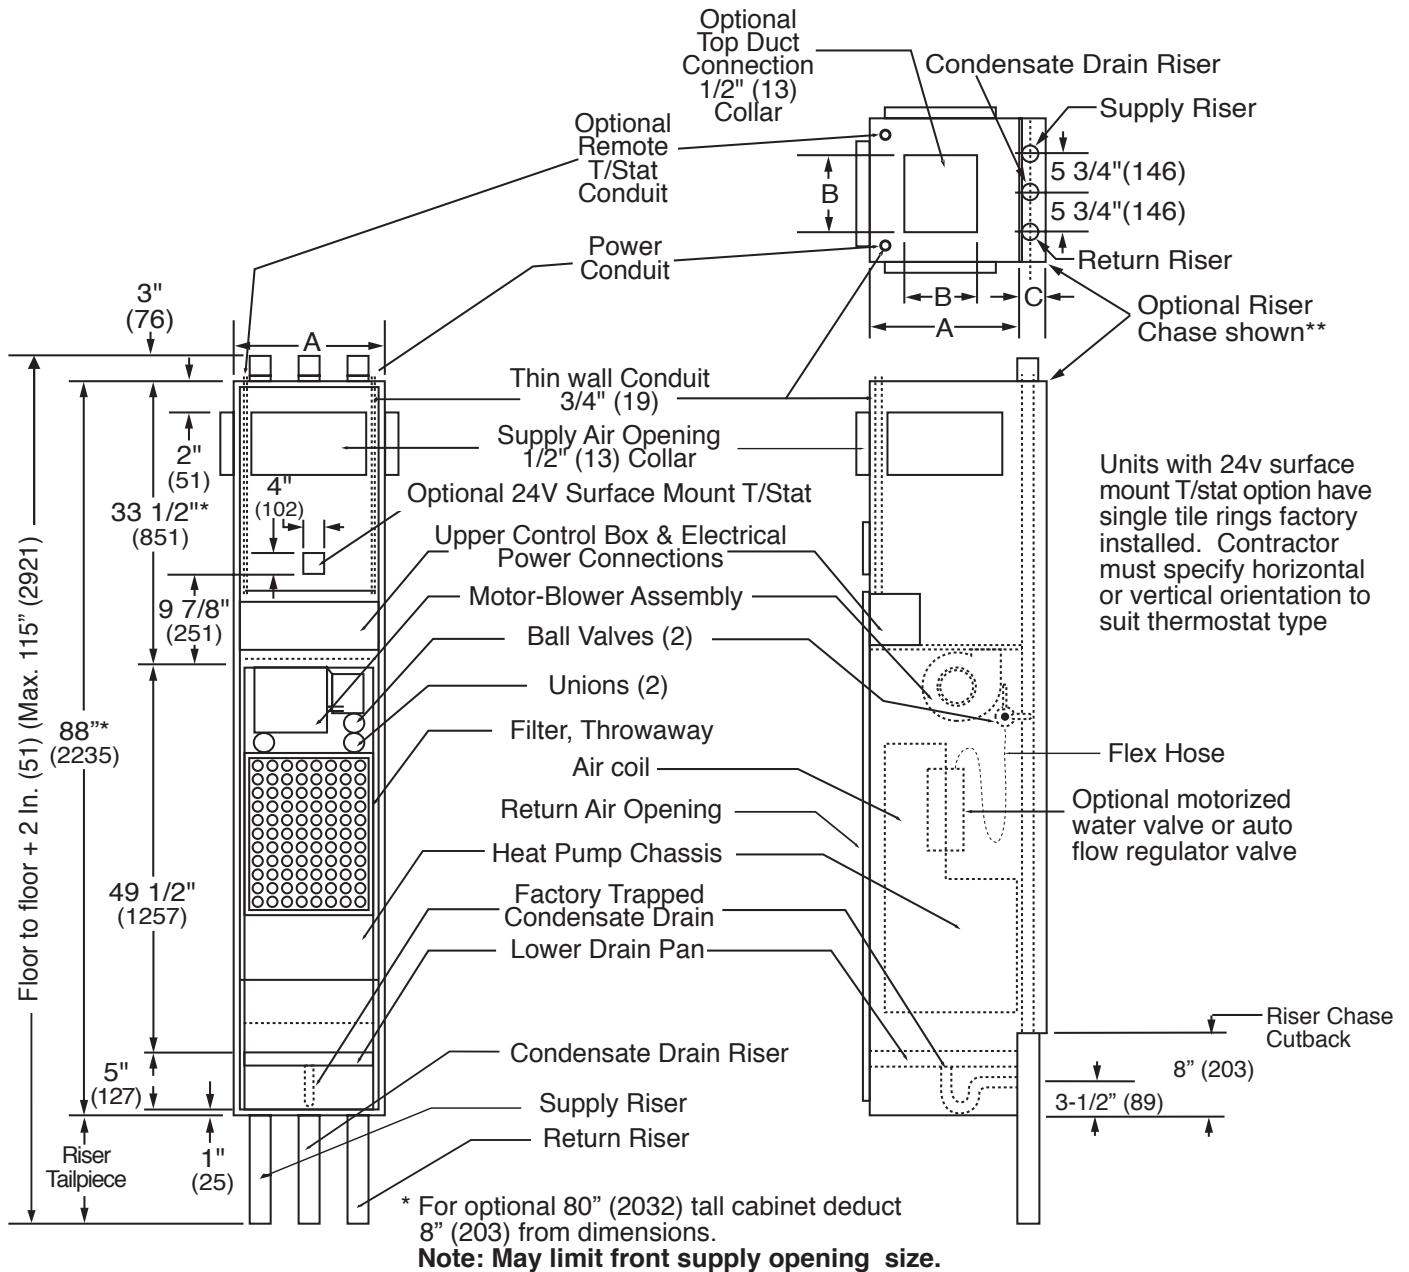

Unit Size	A	B	C**
TRM09 - 12	17 [432]	10 [254]	4-1/4 [92]
TRM15 - 18	20 [508]	13 [330]	4-1/4 [92]
TRM24 - 36	24 [610]	17 [432]	4-1/4 [92]

The riser compartment is defined as being the rear of each unit. Supply air grilles and return air/access panel can be any side except rear.  
\*\* C Dimension = 4-1/4" (92) for risers up to 2-1/2" (64) diameter. Consult factory for larger diameter risers.

**Note: All measurements are in inches, millimeters are in parenthesis.**


## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

# TRM Unit Dimensions

## Master Unit, Furred In Cabinet

### (88 in. [2235mm] Height)

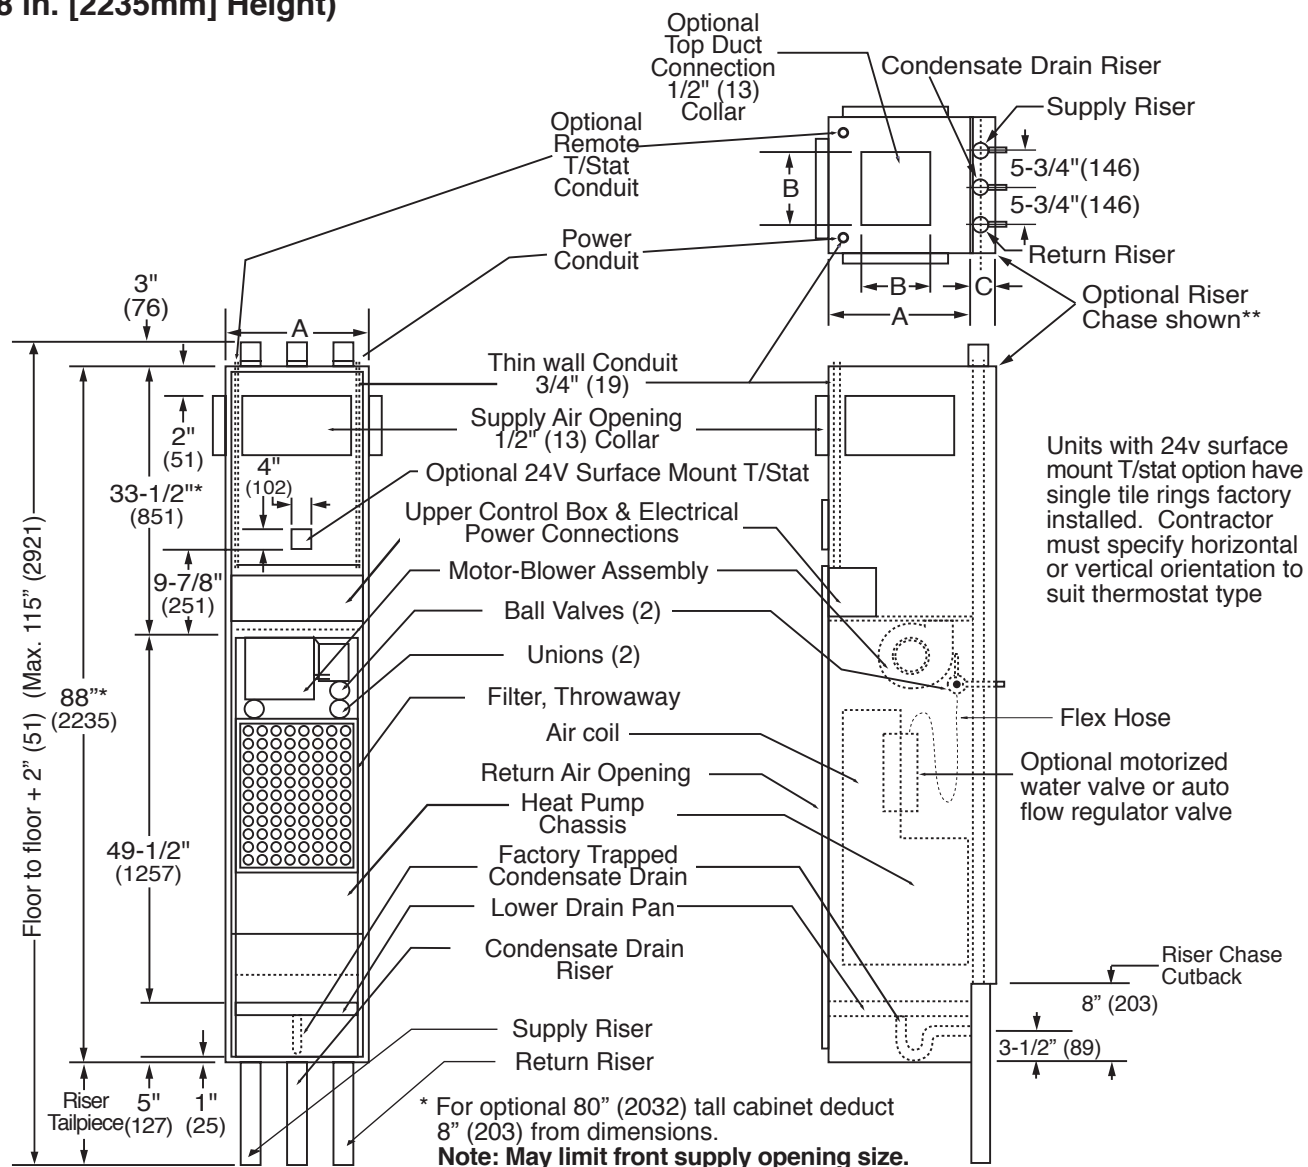


Unit Size	A	B	C**
TRM09 - 12	17 [432]	10 [254]	4-1/4 [92]
TRM15 - 18	20 [508]	13 [330]	4-1/4 [92]
TRM24 - 36	24 [610]	17 [432]	4-1/4 [92]

The riser compartment is defined as being the rear of each unit. Supply air grilles and return air/access panel can be any side except rear. Must provide crossover water piping from Master to Slave unit. Master unit has no riser chase.


\*\* C Dimension = 4 1/4" (92) for risers up to 2 1/2" (64) diameter. Consult factory for larger diameter risers.

Field supplied and installed piping.  
Cross hoses in slave cabinet  
(36" hoses required in slave unit)

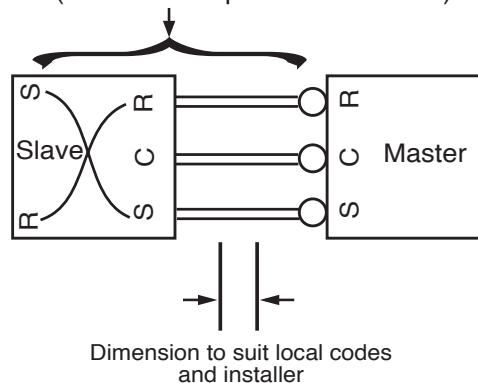

**Note: All measurements are in inches, millimeters are in parenthesis.**

# **TRM Unit Dimensions** **Slave Unit, Furred In Cabinet** **(88 in. [2235mm] Height)**

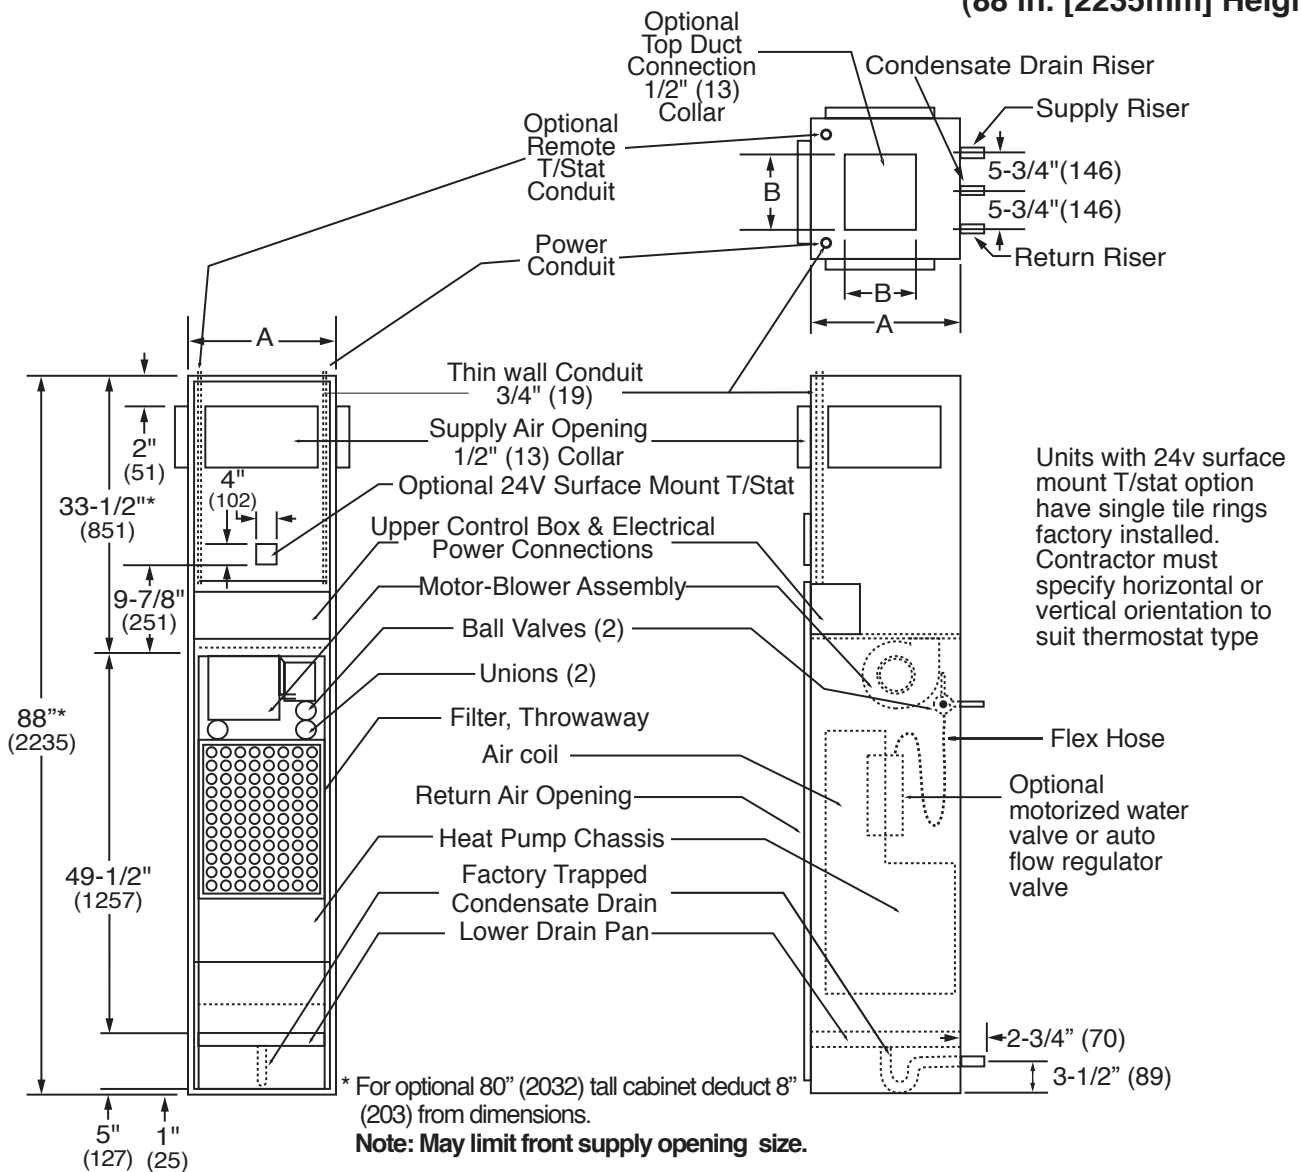


Unit Size	A	B
TRM09 - 12	17 [432]	10 [254]
TRM15 - 18	20 [508]	13 [330]
TRM24 - 36	24 [610]	17 [432]

The riser compartment is defined as being the rear of each unit. Supply air grilles and return air/access panel can be any side except rear. Must provide crossover water piping from Master to Slave unit. Master unit has no riser chase (stub-outs only).



**Note: All measurements are in inches, millimeters are in parenthesis.**

Field supplied and installed piping.  
 Cross hoses in slave cabinet  
 (36" hoses required in slave unit)

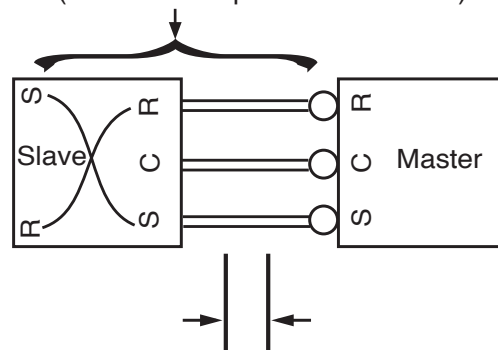

Dimension to suit local codes and installer

## TRM Cabinet Configurations

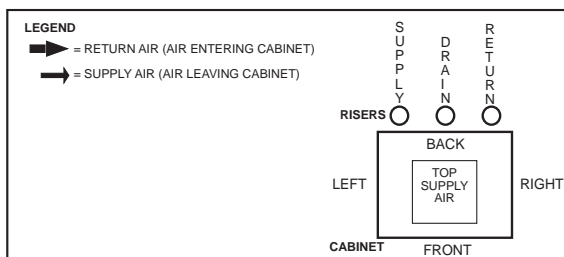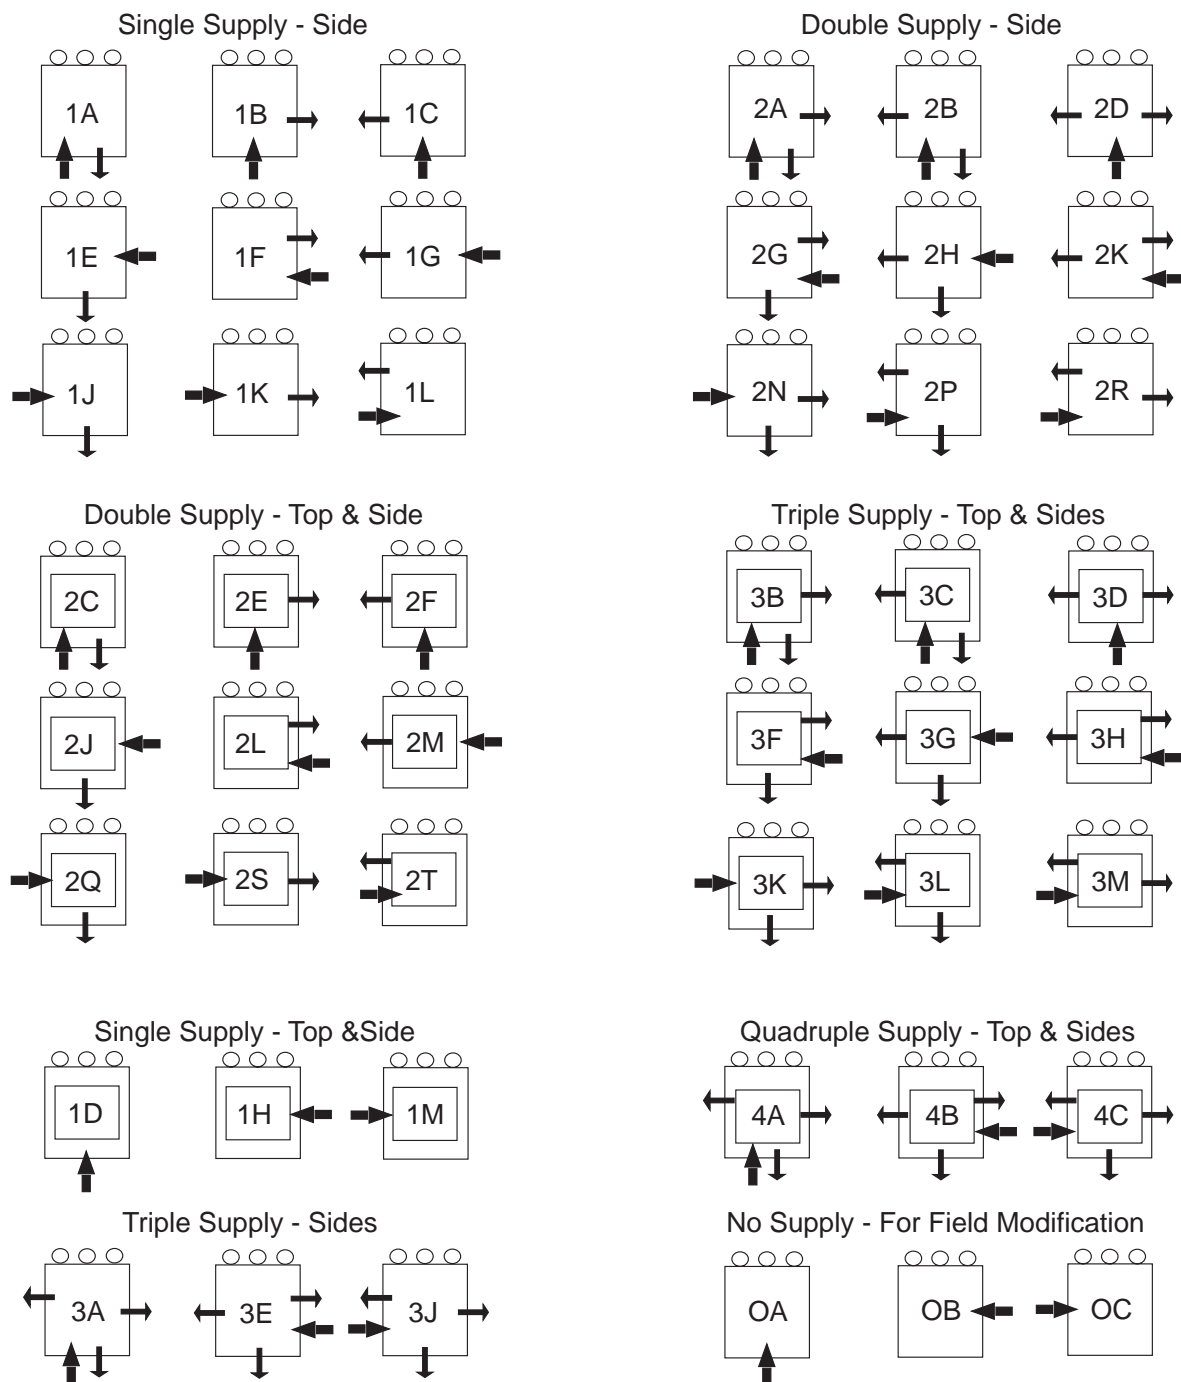

## NOTES:


- 1: The riser compartment is defined as being the rear of each unit. Supply air grilles and return air/access panel can be any side except rear.
- 2: Return air side also defines control location and service access.
- 3: Triple discharge openings are not recommended for sizes TRM09 & TRM12. Single discharge openings are not recommended for sizes TRM24, 30, 36 (Except top discharge).
- 4: Solid plenum option for field conversion of discharge air arrangement is available.

## Air Flow vs. Grille Selection


\* Grilles are shipped loose for field installation after drywall has been applied to cabinets that are furred in.

\*\* Grilles are brushed aluminum or painted (polar ice).


Single Deflection- Adjustable vertical blades for controlling horizontal path of discharge air.



Double Deflection- Adjustable vertical and horizontal blades for controlling horizontal and vertical path of discharge air. (Recommended for all standard applications.)




Double Deflection with Opposed Blade Damper- Addition of opposed blade damper to grille allows control of air volume (CFM) and path of discharge air. (Recommended for applications requiring unequal air flow or side discharge grille(s) with additional top discharge air opening.)



Unequal Air Flow- Air discharges requiring different air volumes (CFM). Use double deflection grilles with opposed blade damper.



Note: Units with adjacent grilles and opposed blade dampers may require special grilles. Consult factory with specific application.



Top Discharge- Units are designed to operate against relatively low air resistance (external static). Use of liberal duct sizing is recommended to maximize total unit air flow (CFM). Top duct outlet will offer more resistance to air flow than side outlets on the same cabinet. Therefore side outlet grille(s) must have opposed blade dampers to field balance the air flow.

Multiple Discharge/Top Grille & Opening  
Sizing When Air Flow Is Divided Equally

Multiple Discharge/Top Discharge Grille & Opening  
Sizing When Air Flow Is Divided Unequally

Unit Size	Single Discharge	Double Discharge	Triple Discharge	Model	Specified Discharge CFM	Grille Selection Chart												Top Discharge Opening Size (Up to 100% Unit CFM)
TRM09	12" x 10" [305 x 254]	10" x 6" [254 x 152]	Not Recommended			10" [254] Wide x			12" [305] Wide x			14" [356] Wide x		16" [406] Wide x				
						6"H	8"H	10"H	6"H	10"H	12"H	6"H	8"H	6"H	10"H	12"H	14"H	
TRM12	12" x 12" [305 x 305]	10" x 8" [254 x 203]	Not Recommended	09 12	100 - 150	X			X								10 x 10 [254 x 254]	
TRM15 - 18	16" x 12" [406 x 305]	14" x 8" [356 x 203]	14" x 6" [356 x 152]		175 - 225		X											
					250 - 275			X		X								
TRM24	Not Recommended	16" x 10" [406 x 254]	16" x 6" [406 x 152]	15 18	150 - 200						X						13 x 13 [330 x 330]	
TRM30	Not Recommended	16" x 12" [406 x 305]	12" x 10" [305 x 254]		250 - 325								X					
					400 - 450									X				
TRM36	Not Recommended	16" x 14" [406 x 356]	16" x 10" [406 x 254]	24 30 36	200 - 275									X			17 x 17 [432 x 432]	
					300 - 350					X								
					375 - 450										X			
					500 - 600										X			
					625 - 725											X		

## Tranquility Vertical Stack (TRM) Series


Rev.: 05/23/07D

## Riser Definitions

Riser Tailpiece (length of riser that extends down from cabinet bottom) -

Dimension F on submittal drawing- Riser tailpiece sized for 2" (51) insertion into 3" (76) expanded section at top of cabinet. Actual job fit may be 1" (25) to 3" (76) insertion (built-in +1" (25) floor to floor tolerance). Riser tailpiece should extend beneath bottom of slab a minimum of 5" (127) to facilitate brazing.

3" Expanded Section - Riser expanded at top of unit to accept a pipe diameter from unit above. (Top of riser always 3" (76) above top of unit.)

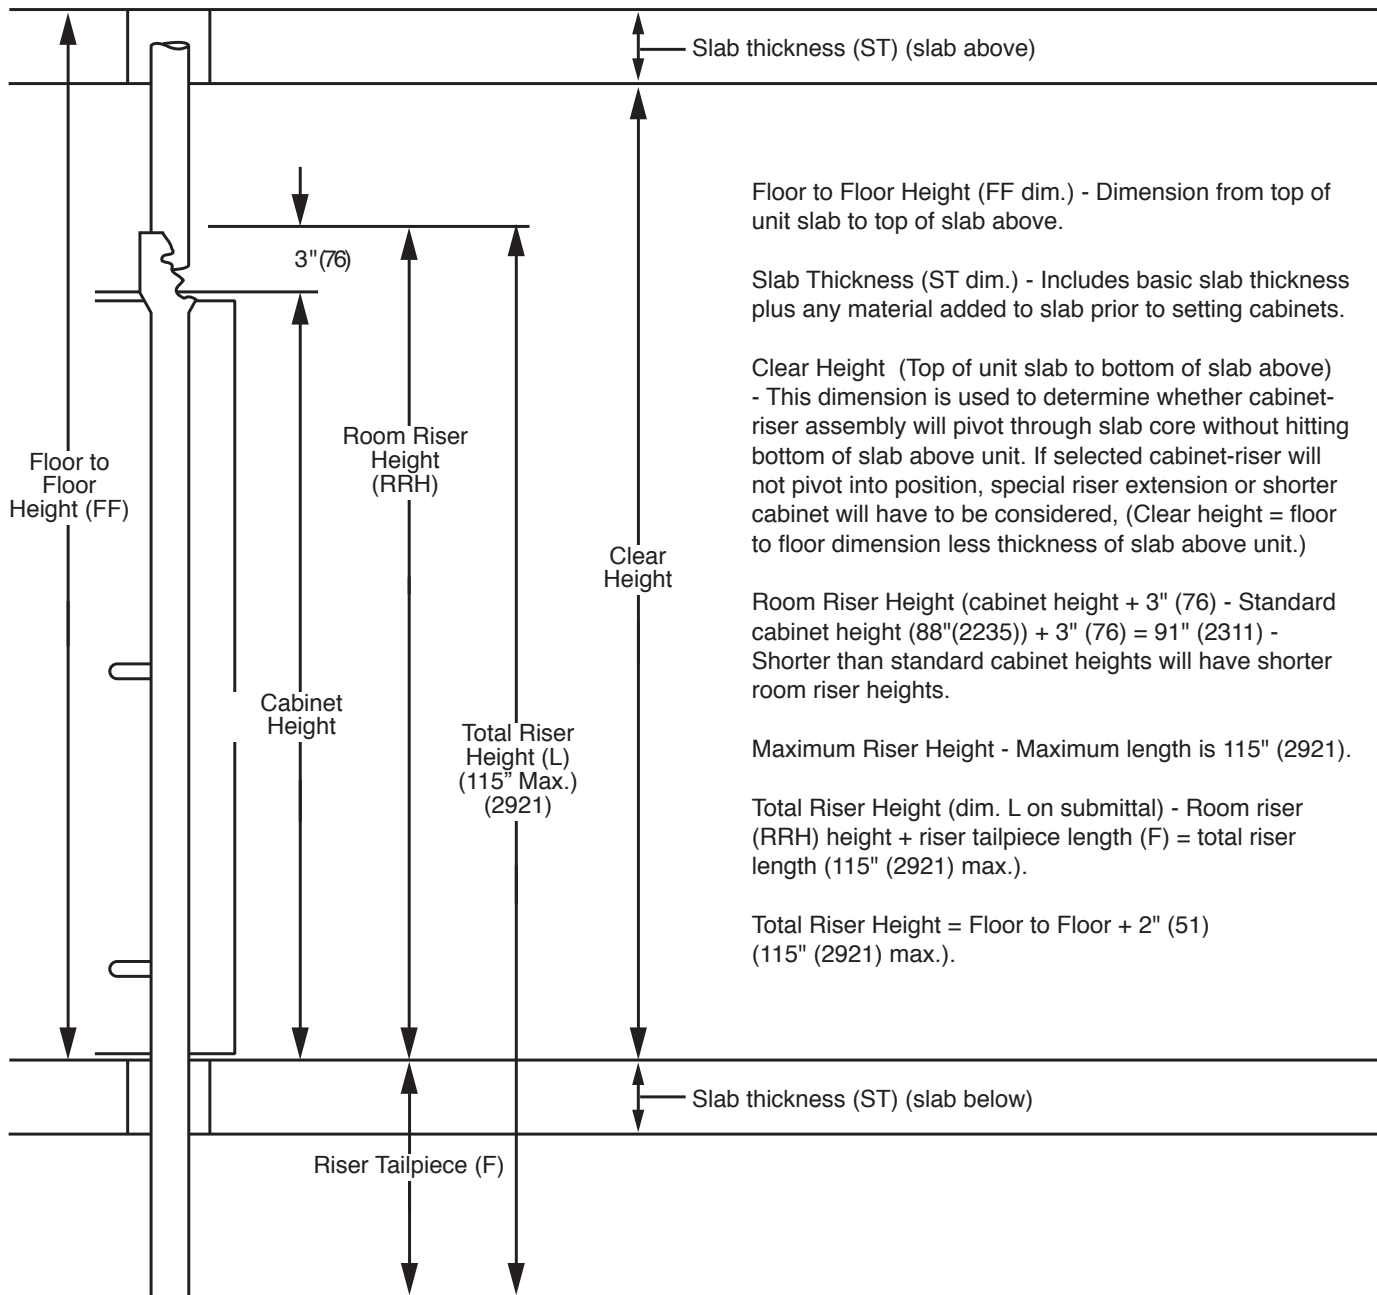

## Riser Arrangements Top Floor Units

1. All Risers Capped At Cabinet Run-Outs
  - System piping is bottom supply & return

Standard for bottom supply & return unless otherwise specified.



2. All Risers Open At Top
  - Bottom supply & return piping for supplying water to other units
  - Bottom supply & return piping for drain vent to roof, flushing crossover
  - Top supply & return piping

Standard for top supply & return unless otherwise specified.




3. Supply & Return Open, Drain Capped At Cabinet Run-Out
  - Bottom supply & return piping with open top for venting or flushing crossover
  - Top supply & return



4. Capped Supply and Return, Drain Open At Top
  - Bottom supply & return piping with open drain riser for venting to roof or picking up drain from other equipment above



5. Supply Or Return Open At Top, Others Capped At Cabinet Run- Out
  - Bottom supply & top return piping
  - Top supply & bottom return piping



Note: Check system flushing & air venting specifications.



## Riser Arrangements Bottom Floor Units

### 1. All Riser Through Slab At Bottom

- Bottom supply & return
- Top supply & return feeding other equipment below

Standard for bottom supply & return unless otherwise specified.



### 2. Supply & Return Capped At Cabinet Run-Out, Drain Through Slab

- Top supply & return
- Supply & return mains above these units on "Between-Floors" main piping

Standard for top supply & return unless otherwise specified.




### 3. All Risers Capped At Cabinet Run-Out, Drain Through Slab

- Isolated unit top supply & return from adjacent riser with separate drain
- Check riser venting




### 4. Supply Or Return Capped At Cabinet Run-Out, Other Risers Extend Through Slab

- Bottom supply, top return piping
- Bottom return, top supply piping



Note: Check system flushing and air venting specifications.

## Riser Extension Sizing

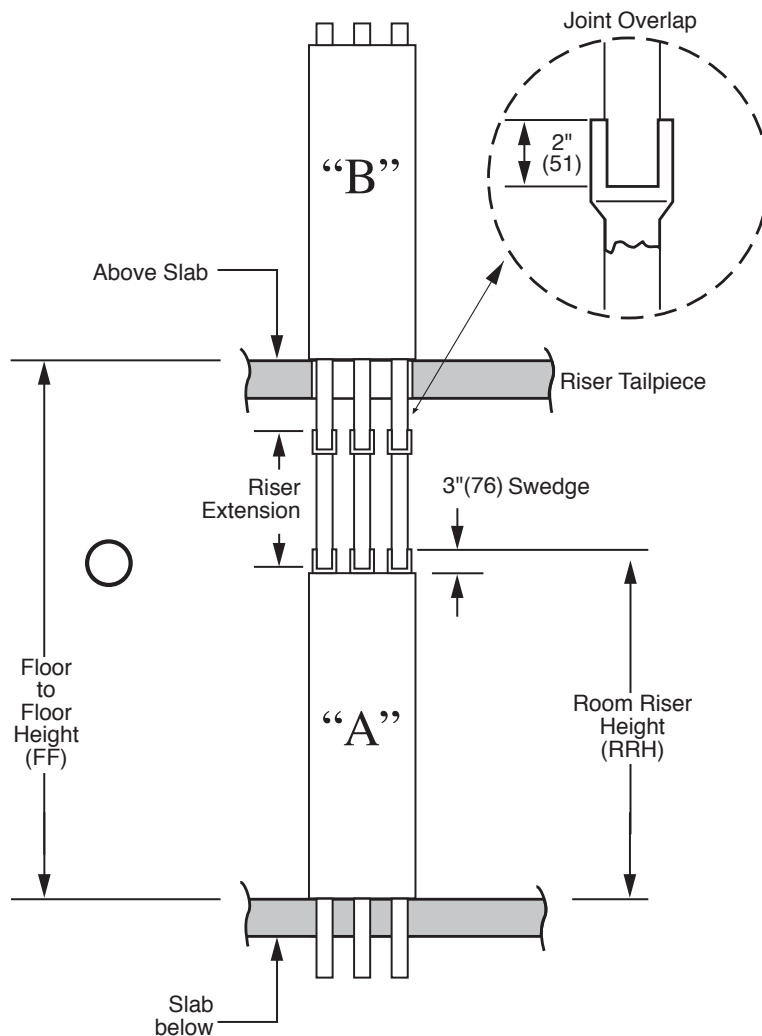

**Riser Tail Piece:** Length of riser extending down from the cabinet. Riser tail piece must extend a minimum of 5" (127) below slab.

**Room Riser Height (RRH):** Cabinet height + 3" (76). Standard Cabinet is 88" (2235) + 3" (76) = 91" (2311).

**Floor To Floor Height (FF):** Distance from top of unit slab to top of above slab.

**Riser Extension Length:** Start with the floor to floor Dim. (FF) From this subtract the room riser height and tail piece length. Then add 4" (102) to the two joint overlaps.

**Riser Extension:**  $FF - (\text{tailpiece} + \text{RRH}) + 4" (102)$ .

Example: Floor to floor (FF) = 120" (3048)


Room Riser Height (RRH) = 91" (2311)

Tail Piece = 13" (330).

Riser Extension:  $120" (3048) - (13" (330) + 91" (2311)) + 4" (102) = 20" (508)$ .

NOTE: Riser extensions are ordered for unit on floor above (example shown - riser extensions would be for Unit "B")

## Riser Length Sizing

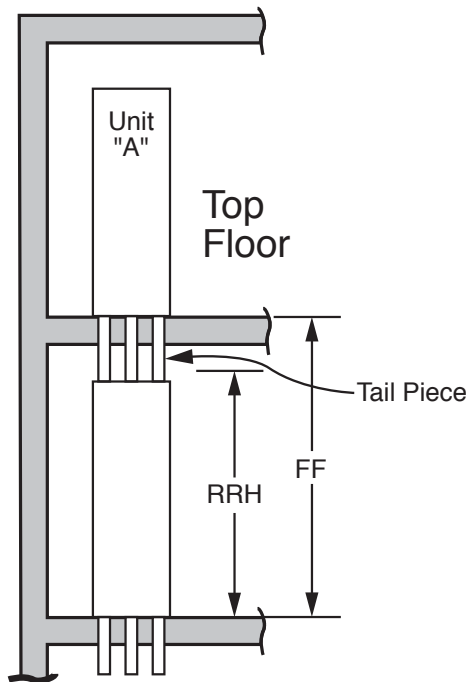

To determine the riser tail piece length of a unit (unit "A").


Riser Tail Piece ( of unit A)=  $FF - RRH + 2"$  (51).

RRH: Room riser height is cabinet height + 3" (76).

Standard cabinet height is 88" (2235).

$RRH = 88" (2235) + 3" (76) = 91" (2311)$ .

FF: Floor to Floor height is the dimension from the top of the slab above to the top of the slab below.

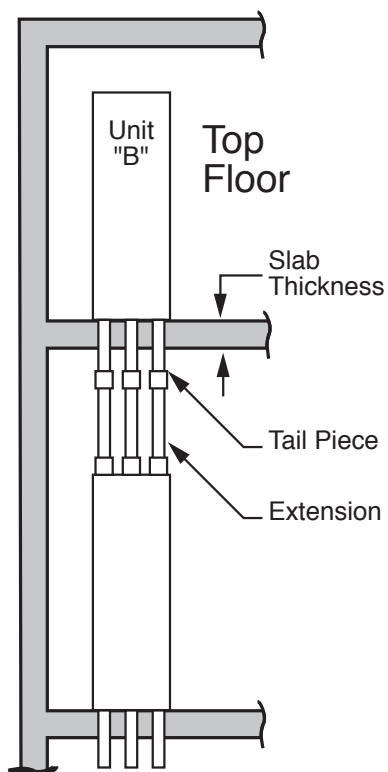

To determine the riser tail piece length of a unit (unit "B") that will require riser extensions to a unit below.

Minimum Tail Piece Length (of unit "B") = slab thickness + 5" (127).

To determine riser extensions lengths see page Riser Extension Sizing.

Note: If riser length exceeds 115" (2921), riser extensions must be used. See Riser Extension Sizing. The riser tail piece must extend through the slab a minimum of 5" (127) to facilitate brazing. Special care must be taken in sizing riser lengths and tail piece lengths when:

- A) Riser extensions are used.
- B) Floor to floor heights vary.
- C) Slab thickness varies from floor to floor.

See Riser Arrangement for selection of top floor riser applications.


## Cabinet Height & Slab Slot Size

To determine the slab slot size required for the risers and to determine if clear height is OK for unit installation, use the cabinet height and slab slot charts on the next page.

To use the charts you will need the clear height in the room the unit is in, size of unit, number of risers, riser dimensions and type of installation. (See below)


### Type 1 Single Units

With a minimum clear height of 94" (2388). Start with the unit lying on the chase.

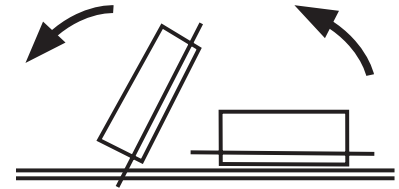


### Type 2 Single Units

With a minimum clear height of 96" (2438). Start with the unit lying with the chase on top.

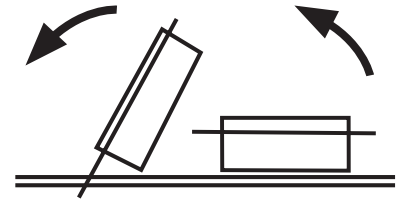

### Type 3 Single

With a minimum clear height of 94" (2388). Start with the unit lying on its side as shown.

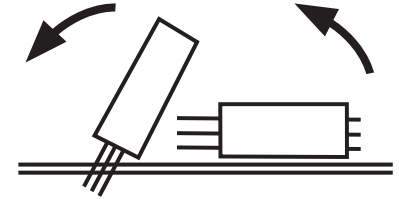




If any clear height is less than 96" (2438) check the minimum cabinet height and slot size chart to determine if the size unit you need will fit. If the standard 88" (2235) cabinet does not fit check the short 80" (2032) cabinet height and slot size chart. Call the factory if the short 80" (2032) cabinet does not fit. Check with the contractor for OK to use 80" (2032) cabinet.

Clear Height (swing height) = Floor to Floor Dimensions - Slab Thickness of Slab above the unit.  $CH = FF - ST$ .

## Slab Slot Chart - 3 Pipe


## 3 Pipe Standard 88" Cabinet

Model TRM	Clear Height	Slab Slot Size		
		Type of Installation		
		Type 1	Type 2	Type 3
		 W x L	 W x L	 W x L
09 - 12	96	5 7/8" X 15" [149 X 381]	5 7/8" X 15" [149 X 381]	5" X 15" [127 X 381]
	95	6 1/4" X 15" [159 X 381]	5 3/8" X 15" [137 X 381]	5" X 15" [127 X 381]
	94	6 5/8" X 15" [168 X 381]	5 3/8" X 15" [137 X 381]	5" X 15" [127 X 381]
	93	7" X 15" [179 X 381]	Not Recommended	5" X 15" [127 X 381]
	92	7 1/2" X 15" [191 X 381]	Not Recommended	Not Recommended
15 - 18	96	6 1/4" X 18" [159 X 457]	5 1/8" X 18" [130 X 457]	5" X 18" [127 X 457]
	95	6 3/4" X 18" [171 X 457]	5 3/8" X 18" [137 X 457]	5" X 18" [127 X 457]
	94	7 1/8" X 18" [181 X 457]	Not Recommended	5" X 18" [127 X 457]
	93	7 5/8" X 18" [194 X 457]	Not Recommended	5" X 18" [127 X 457]
24 - 36	96	7" X 22" [178 X 559]	5 1/8" X 22" [130 X 599]	5" X 22" [149 X 599]
	95	7 1/2" X 22" [191 X 559]	Not Recommended	5" X 22" [149 X 599]
	94	8" X 22" [203 X 559]	Not Recommended	5" X 22" [149 X 599]
09 - 12	91 or less	Not Recommended	Not Recommended	Not Recommended
15 - 18	92 or less	Not Recommended	Not Recommended	5" X 18" [149 x 457]
24 - 36	93 or less	Not Recommended	Not Recommended	5" X 22" [127 x 599]

To use this chart look down the model column to find the model. Then look across to find the clear height. If your clear height exceeds 96" use the 96" slab slot size. Then under the type of installation read the slab slot size.

Above charts allow 1" tolerance in clear height to allow for variance in floor to floor dimensions.

Clear height is the floor to floor dimension of the floor the unit is on minus the slab thickness above.

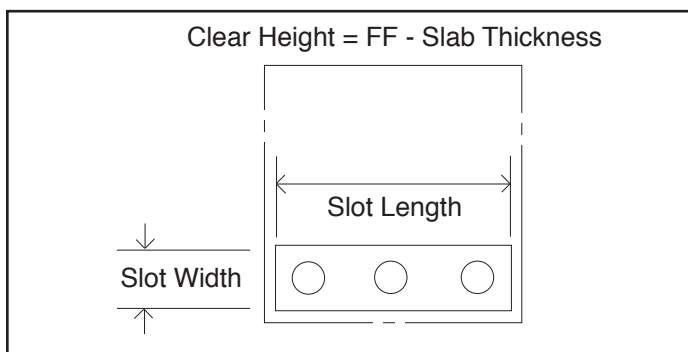

## Shipping

### Units Are Shipped FOB Factory

ClimateMaster Hi-Rise Cabinets are normally shipped to the jobsite on dedicated open flatbeds trailers, palletized for maximum shipping density, grouped together by building, size and floor where possible, wrapped and covered with tarp for protection (Figure 1). The size of each pallet depends upon the cabinet size and number of cabinets (Figure 2).

Special shipping accommodations can be provided by ClimateMaster. Examples might include:

- Closed truck or container shipping, on special end fork pallets.
- Reduced height, width or weight pallets.
- Unit grouped on pallets by riser instead of floor (for example, a retrofit job).
- Export or over-crating.
- Risers shipped separately from cabinets.

However, any such special shipping needs must be included with the order of the units. ClimateMaster will charge extra for any accommodations which significantly increase the cost of the shipment.

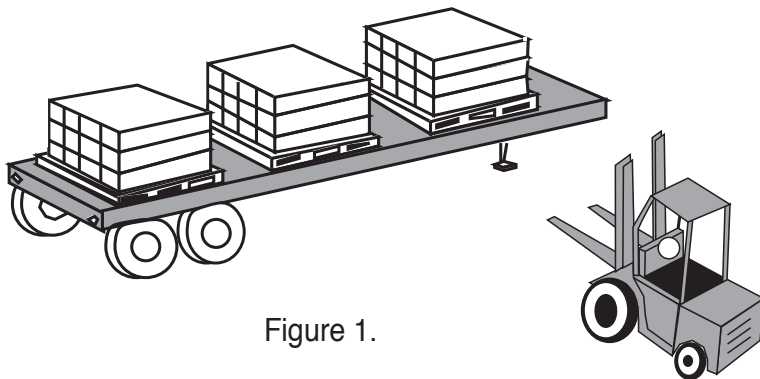


Figure 1.

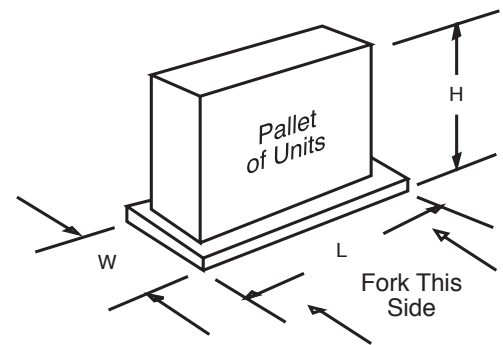


Figure 2.


Cabinet Size	# of Cabinets	L (in.)	W (in.)	H (in.)	Approx. Weight per pallet	Approx. Quantity per truck
09 - 12	4	106*	22	84	725	80
	8	106*	44	84	1450	80
15 - 18	4	106*	25	96	785	80
	8	106*	50	96	1570	80
24 - 36	3	106*	29	87	750	60
	6	106*	58	87	1500	60

\* 106" for standard, 104" long risers (typically add 2" to riser length.)

## Riser GPM Sizing

Riser GPM requirements and individual Unit GPM requirements are necessary to select the proper Riser Piping diameters. Refer to this page to determine GPM requirement, then refer to Riser Diameter Sizing Table to determine Riser Piping diameters.

Example is for bottom supply - bottom return system feed loop. GPM's are dependent upon unit load and system loop water temperatures. Please refer to Performance Charts for individual Unit GPM requirements.

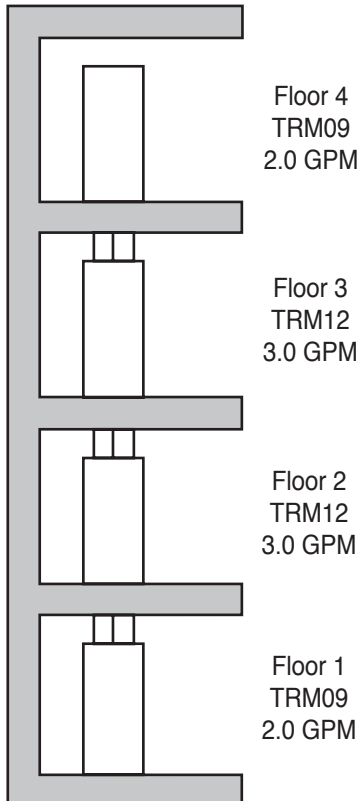

Unit GPM (UGPM) = Required gallon per minute from "Performance Charts," in "Vertical Stacked Design Guide."

Total Riser GPM (TRGPM) = The sum of, all Units, GPM on each Riser.

Total GPM Per Floor (TGF) = Total GPM minus the sum of Unit GPM from all floors below.  $TGF = TRGPM - (\text{sum UGPM from units below})$ .

Example: Four floors, Consisting of units sizes TRM09 and TRM12, as shown in diagram. GPM's are 2.0 and 3.0 respectively.

$$TRGPM = 2.0 + 3.0 + 3.0 + 2.0 = 10 \text{ GPM.}$$

Floor 4:  $TGF = 10 - (3.0 + 3.0 + 2.0) = 2 \text{ GPM}$  needed at floor 4.

Floor 3:  $TGF = 10 - (3.0 + 2.0) = 5 \text{ GPM}$  needed at floor 3.

Floor 2:  $TGF = 10 - (2.0) = 8 \text{ GPM}$  needed at floor 2.


Floor 1:  $TGF = 10 - (\text{no floors below}) = 10 \text{ GPM}$  needed at floor 1.

Refer to Riser Diameter Sizing page.

## Riser Diameter Sizing

Refer to Riser GPM Sizing for the prefix to this example.

Each TRM Vertical Stack unit has three riser pipes. The following example will be for one riser pipe (from the top floor to the bottom floor), and will be representative of the remaining two riser pipes.

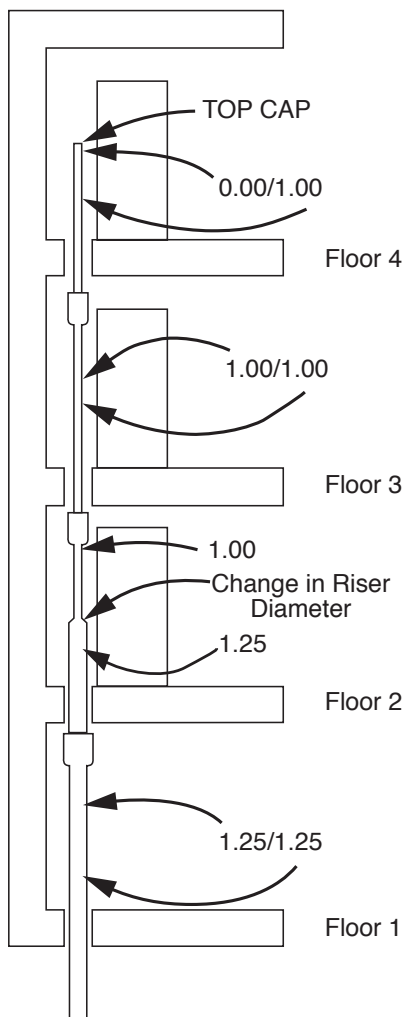

From Table 1 (below) determine the proper riser diameter needed to satisfy the required GPM's at each unit. Refer to Table 2 (below) for a summary.

The following nomenclature is used to designate the diameters at the top and bottom of each unit.

Top Cap - Top half of riser is eliminated and sealed.

Bottom Cap - Bottom half of riser is eliminated and sealed.

0.00/1.00 - Indicates top cap/1" bottom.

1.00/1.25 - Indicates 1" top/1.25" bottom.

1.25/0.00 - Indicates 1.25" top/bottom cap.

(from this we develop Table 3)

Note: Transitions limited to 1 nominal diameter size larger or smaller within each floor.

**Table 1**

Maximum GPM	12	20	34	70	125	300
Nominal Riser Diameter	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"

**Table 2**

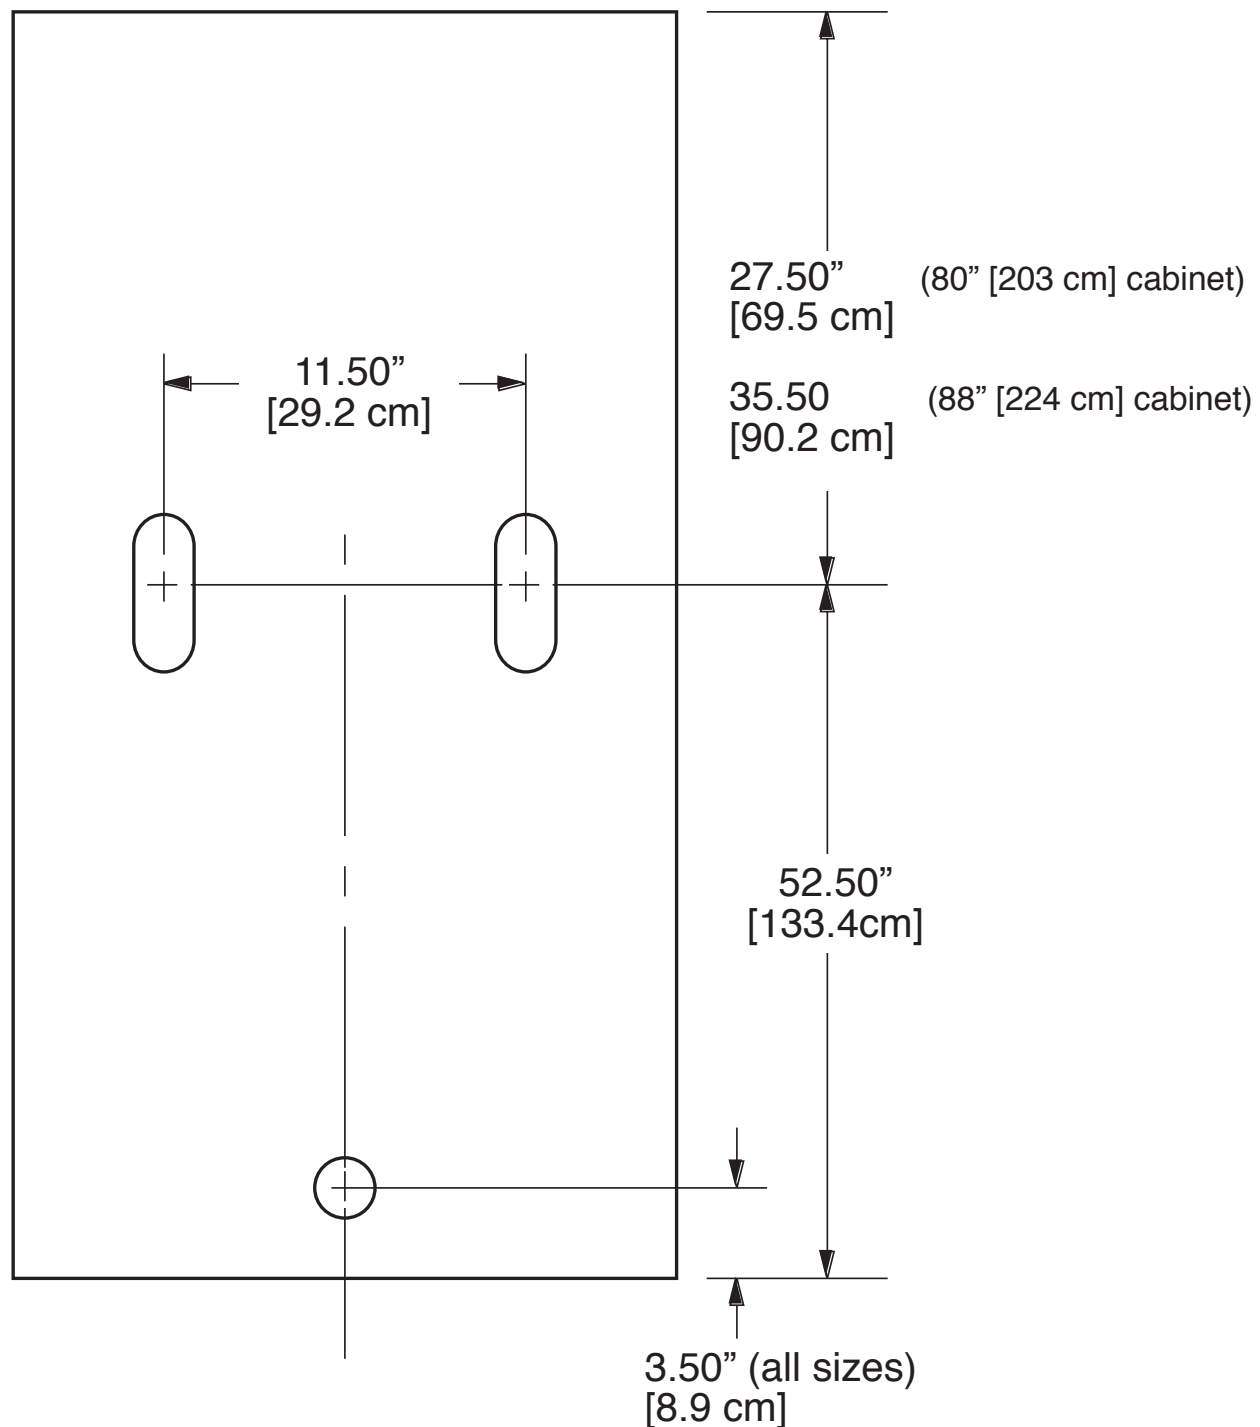
Floor	GPM	Diameter From Table 1
4	2	1" [19]
3	5	1" [19]
2	8	1" [25.4]
1	10	1.25" [25.4]

**Table 3**

Nomenclature per Unit	Description
0.00/1.00	Top Cap, w/1" Bot Feed
1.00/1.00	1" Full Length Riser
1.00/1.25	1" Top, 1.25" to 1st Floor
1.25/1.25	1.25" Full Length Riser

Values from Table 3 are to be entered on the Riser Piping Schedule. Top diameter must match bottom diameter of floor above.



**Riser Slot Arrangements**

Always figure riser extension from the bottom of the cabinet, total extension length is effective length plus 2" [5.1 cm]

Standard riser arrangement is 3" [7.6 cm] above and 13" [33 cm] below to 24" [61 cm] below (overall riser=115" [292.1 cm] Max.)

Type M and L copper available

## Tranquility Modular - TRM Series

### Engineering Specifications Rev.: 04/02/07

#### General:

Furnish and install ClimateMaster Water Source Heat Pumps, as indicated on the plans with capacities and characteristics as listed in the schedule and the specifications that follow.

#### Vertical Stack Water Source Heat Pumps:

Units shall be low range, 20° to 120°F (-6.7° to 48.9°C) entering water temperature for low temperature application. Equivalent units from other manufacturers can be proposed provided approval to bid is given 10 days prior to bid closing. All equipment listed in this section must be rated and certified in accordance with American Refrigeration Institute / International Standards Organization (ARI / ISO) and Environmental Testing Laboratories for United States and Canada (ETL-US-C). The units shall have ARI / ISO and ETL-US-C labels. All cabinets shall be factory tested under normal operating conditions, risers shall be pressure tested and chassis shall be factory tested under normal operating conditions and water flow rates. **Units tested without water flow are not acceptable.**

#### Basic Construction:

The cabinet panels shall be fabricated from heavy gauge galvanized steel. The rigid one-piece cabinet shall be constructed so that it is self-supporting, and can be installed long before the chassis arrival, and to be able to avoid damage during construction. Top, base, fan deck, and other metal structural parts are to be 16 gauge construction, while exterior panels to be 20 gauge; unit further strengthened by structural breaks at corners. **Units not constructed of a minimum of these thicknesses are not acceptable.** Cabinet shall have a top panel and a bottom panel for structural rigidity of the cabinet; **no "open" top or "open" bottom designs allowed.**

The cabinet base shall contain a secondary drain pan fully insulated with a pressure differential drain trap connected to the condensate riser pipe, and guide rails for the slide in refrigeration chassis. Drain pan(s) shall be easily accessible for cleaning. All interior surfaces shall be lined with 1/2 inch (12.7mm) thick, dual density 1-3/4 lb/ft<sup>3</sup> (28 kg/m<sup>3</sup>) acoustic type fiberglass insulation. All fiberglass shall be coated and have exposed edges butted up to flanges to prevent the introduction of glass fibers into the air stream.

Standard cabinet panel insulation must meet NFPA 90A requirements, air erosion and mold growth limits of UL-181, stringent fungal resistance test per ASTM-C1071 and ASTM G21, and shall meet zero level bacteria growth per ASTM G22. **Unit insulation must meet these stringent requirements or unit(s) will not be accepted.**

Cabinet arrangements shall allow symmetrical placement of riser piping on any of the three sides of the cabinet not used for the chassis access. All Cabinet openings shall have dry wall flanges on all sides. Supply air openings shall be factory cut and flanged as shown on plans. For air noise attenuation purposes, the discharge air from fan shall discharge into insulated plenum that also contains insulated air baffles at all cabinet supply air openings. **Units not having supply air noise baffles are not acceptable.** Cabinet design shall allow a full height base board (5 inches/127mm) beneath the chassis access. The cabinet shall contain an easily removable motor/blower assembly.

Full length supply, return, and insulated condensate water risers shall be type M copper with integral internal piping including ball valves (for shut off purposes at unit). Field installed hose kits are required to connect the chassis piping to the cabinet piping. The condensate riser shall be insulated with 3/8" (9.5mm) Armaflex type insulation. The top of each riser shall be deeply swaged (3 in./ 76.2mm) to accept connection to the riser above/below, allowing for a floor to floor dimensional variance of ± one inch (25.4mm). **Units not having swaged riser-piping connections shall not be acceptable. Couplings and trim pieces shall not be allowed.**

*Option: Type L riser piping.*

*Option: Unit mounted Thermostat provisions -- includes insulated junction box mounted inside discharge plenum that is connected to Molex-type connector wired to unit thermostat terminals, and having tile ring on cabinet for drywall installation to accept thermostat mounting. Use part number A9155724, A9155728 or A9155729 thermostat assembly, which is thermostat model ATM11C01, ATM11C03 or ATA11C04, respectively with mating Molex-type connector.*

#### Fan and Motor Assembly:

The cabinet shall contain a removable motor/blower assembly. Units shall have a direct drive centrifugal fan. The fan motor shall be 2 speed, permanently lubricated, PSC type with thermal overload protection. The fan motor shall be isolated from the fan housing by a torsionally flexible motor mounting system with rubber type grommets to inhibit vibration induced high noise levels associated with "hard wire belly band" motor mounting. Airflow/External static pressure rating of the unit shall be based on a wet coil and clean filter.

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

**Chassis:**

The chassis, which incorporates the air coil, water coil, drain pan, and compressor, shall be easily installed for quick jobsite installation and future servicing purposes. The slide in chassis shall have an insulated panel separating the fan compartment from the compressor compartment. Compressors are not in the air stream. The chassis base shall be fabricated from heavy gauge galvanized steel formed to match the slide in rails of the cabinet. All electrical connections between the chassis and cabinet shall be made via locking quick-connects. Units shall have a factory installed 1 inch (25.4mm) thick filter bracket and throwaway type glass fiber filter. Furnish one spare set of filters.

Water connections between chassis and the cabinet shall be accomplished via a hose kit consisting of Kevlar-reinforced EPDM core hose surrounded by a stainless-steel braid. Hose kit shall have brass fittings with stainless-steel ferrules. Hose ends shall be solid External NPT which connects to mating fitting on cabinet shut off ball valve(s), and Internal NPSM (National Pipe Straight Mechanical) swivel end with fiber or EPDM washer which connects to mating threaded end connection on chassis. The hose kit shall be rated for 350 psi (2412 kPa) design working pressure.

**Refrigerant Circuit:**

All units shall contain an EarthPure™ (HFC 410A) sealed refrigerant circuit including a high efficiency scroll or rotary compressor designed for heat pump operation, a thermostatic expansion valve for refrigerant metering, an enhanced corrugated aluminum lanced fin and rifled copper tube refrigerant to air heat exchanger, reversing valve, coaxial (tube in tube) refrigerant to water heat exchanger, and safety controls including a high pressure switch, low pressure switch (loss of charge), water coil low temperature sensor, and air coil low temperature sensor. Access fittings shall be factory installed on high and low pressure refrigerant lines to facilitate field service. Activation of any safety device shall prevent compressor operation via a microprocessor lockout circuit. The lockout circuit shall be reset at the thermostat or at the contractor supplied disconnect switch. **Units that cannot be reset at the thermostat shall not be acceptable.**

Hermetic compressors shall be internally sprung and externally isolated. The compressor shall have a dual level vibration isolation system. The compressor will be mounted on rubber grommets to a large heavy gauge compressor mounting tray plate, which is then isolated from the cabinet base with vibration isolation springs for maximized vibration attenuation. All units (except units with rotary compressors) shall include a discharge muffler to further enhance sound attenuation. Compressor shall have thermal overload protection.

Refrigerant to air heat exchangers shall utilize enhanced corrugated lanced aluminum fins and rifled copper tube construction rated to withstand 625 PSIG (3101 kPa) refrigerant working pressure. Refrigerant to water heat exchangers shall be of copper inner water tube and steel refrigerant outer tube design, rated to withstand 625 PSIG (3101 kPa) working refrigerant pressure and 500 PSIG (3101 kPa) working water pressure. The refrigerant to water heat exchanger shall be "electro-coated" with a low cure cathodic epoxy material a minimum of 0.4 mils thick (0.4 – 1.5 mils range) on all surfaces. The black colored coating shall provide a minimum of 1000 hours salt spray protection per ASTM B117-97 on all external steel and copper tubing. The material shall be formulated without the inclusion of any heavy metals and shall exhibit a pencil hardness of 2H (ASTM D3363-92A), crosshatch adhesion of 4B-5B (ASTM D3359-95), and impact resistance of 160 in-lbs (184 kg-cm) direct (ASTM D2794-93).

Refrigerant metering shall be accomplished by thermostatic expansion valve only. Expansion valves shall be dual port balanced types with external equalizer for optimum refrigerant metering. Reversing valve shall be four-way solenoid activated refrigerant valve, which shall default to heating mode should the solenoid fail to function. If the reversing valve solenoid defaults to cooling mode, an additional low temperature thermostat must be provided to prevent over-cooling an already cold room.

*Option: The refrigerant to air heat exchanger shall be "electro-coated" with a low cure cathodic epoxy material a minimum of 0.4 mils thick (0.4 – 1.5 mils range) on all surfaces. The black colored coating shall provide a minimum of 1000 hours salt spray protection per ASTM B117-97 on all galvanized end plates and copper tubing, and a minimum of 2000 hours of salt spray on all aluminum fins. The material shall be formulated without the inclusion of any heavy metals and shall exhibit a pencil hardness of 2H (ASTM D3363-92A), crosshatch adhesion of 4B-5B (ASTM D3359-95), and impact resistance of 160 in-lbs (184 kg-cm) direct (ASTM D2794-93).*

*Option: The unit will be supplied with cupro nickel coaxial water to refrigerant heat exchanger.*

*Option: The unit will be supplied with internally factory mounted two-way water valve for variable speed pumping requirements. A factory-mounted or field-installed high pressure switch shall be installed in the water piping to disable compressor operation in the event water pressures build due to water freezing in the piping system.*

*Option: The unit will be supplied with internally factory mounted automatic water flow regulators.*

*Option: The unit will be supplied with internally mounted secondary pump for primary/secondary applications.*

**Cabinet Drain Pan:**

The drain pan shall be constructed of galvanized steel and have a powder coat paint application to further inhibit corrosion. This corrosion protection system shall meet the stringent 1000 hour salt spray test per ASTM B117. If plastic type material is used, it must be HDPE (High Density Polyethylene) to avoid thermal cycling shock stress failure over the lifetime of the unit. Stainless Steel materials are also acceptable. Drain pan shall be fully insulated. Drain pan shall have at a minimum a doubled sloped surface to allow positive drainage to the outlet opening, which shall be at the lowest level of the entire pan surface. Drain outlet shall be connected from pan outlet to condensate riser (if supplied) with factory installed trap inside of cabinet. The unit as standard will be supplied with solid-state electronic condensate overflow protection. **Mechanical float switches will NOT be accepted.**

**Electrical:**

A control box shall be located within the unit compressor compartment and shall contain a 50VA transformer, 24 volt activated, 2 or 3 pole compressor contactor, terminal block for thermostat wiring and solid-state controller for complete unit operation. Reversing valve and fan motor wiring shall be routed through this electronic controller. Units shall be name-plated for use with time delay fuses or HACR circuit breakers. Unit controls shall be 24 Volt and provide heating or cooling as required by the remote thermostat / sensor.

*Option: Disconnect Switch, Non-Fused*

*Option: Circuit Breaker*

**Solid State Control System (CXM):**

Units shall have a solid-state control system. **Units utilizing electro-mechanical control shall not be acceptable.** The control system microprocessor board shall be specifically designed to protect against building electrical system noise contamination, EMI, and RFI interference. The control system shall interface with a heat pump type thermostat. The control system shall have the following features:

- a. Anti-short cycle time delay on compressor operation.
- b. Random start on power up mode.
- c. Low voltage protection.
- d. High voltage protection.
- e. Unit shutdown on high or low refrigerant pressures.
- f. Unit shutdown on low water temperature.
- g. Condensate overflow electronic protection.
- h. Option to reset unit at thermostat or disconnect.
- i. Automatic intelligent reset. Unit shall automatically reset the unit 5 minutes after trip if the fault has cleared. If a fault occurs 3 times sequentially without thermostat meeting temperature, then lockout requiring manual reset will occur.
- j. Ability to defeat time delays for servicing.
- k. Light emitting diode (LED) on circuit board to indicate high pressure, low pressure, low voltage, high voltage, low water/air temperature cut-out, condensate overflow, and control voltage status.
- l. The low-pressure switch shall not be monitored for the first 120 seconds after a compressor start command to prevent nuisance safety trips.
- m. 24V output to cycle a motorized water valve or other device with compressor contactor.
- n. Unit Performance Sentinel (UPS). The UPS warns when the heat pump is running inefficiently.
- o. Water coil low temperature sensing (selectable for water or anti-freeze).
- p. Air coil low temperature sensing.

**NOTE: Units not providing the 8 safety protections of anti-short cycle, low voltage, high voltage, high refrigerant pressure, low pressure (loss of charge), air coil low temperature cut-out, water coil low temperature cut-out, and condensate overflow protections will not be accepted.**

**Option: Enhanced solid state control system (DXM)**

This control system features two stage control of cooling and two stage control of heating modes for exacting temperature and dehumidification purposes.

This control system coupled with a multi-stage thermostat will better dehumidify room air by automatically running the heat pump's fan at lower speed on the first stage of cooling thereby implementing low sensible heat ratio cooling. On the need for higher cooling performance the system will activate the second stage of cooling and automatically switch the fan to the higher fan speed setting. This system may be further enhanced with a humidistat. **Units not having automatic low sensible heat ratio cooling will not be accepted;** as an alternate a hot gas reheat coil may be provided with control system for automatic activation.

Control shall have all of the above mentioned features of the CXM control system along with the following expanded features:

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

- a. Removable thermostat connector.
- b. Night setback control.
- c. Random start on return from night setback.
- d. Minimized reversing valve operation (Unit control logic shall only switch the reversing valve when cooling is demanded for the first time. The reversing valve shall be held in this position until the first call for heating, ensuring quiet operation and increased valve life.).
- e. Override temperature control with 2-hour (adjustable) timer for room occupant to override setback temperature at the thermostat.
- f. Dry contact night setback output for digital night setback thermostats.
- g. Ability to work with heat pump or heat/cool (Y, W) type thermostats.
- h. Ability to work with heat pump thermostats using O or B reversing valve control.
- i. Emergency shutdown contacts.
- j. Boilerless system heat control at low loop water temperature.
- k. Ability to allow up to 3 units to be controlled by one thermostat.
- l. Relay to operate an external damper.
- m. Ability to automatically change fan speed from multistage thermostat.
- n. Relay to start system pump.
- o. 75 VA control transformer. Control transformer shall have load side short circuit and overload protection via a built in circuit breaker.

**Remote Service Sentinel (CXM/DXM):**

Solid state control system shall communicate with thermostat to display (at the thermostat) the unit status, fault status, and specific fault condition, as well as retrieve previously stored fault that caused unit shutdown. The Remote Service Sentinel allows building maintenance personnel or service personnel to diagnose unit from the wall thermostat. The control board shall provide a signal to the thermostat fault light, indicating a lockout. Upon cycling the G (fan) input 3 times within a 60 second time period, the fault light shall display the specific code as indicated by a sequence of flashes. A detailed flashing code shall be provided at the thermostat LED to display unit status and specific fault status such as over/under voltage fault, high pressure fault, low pressure fault, low water temperature fault, condensate overflow fault, etc. **Units that do not provide this remote service sentinel shall not be acceptable.**

**Option: Lonworks interface system**

Units shall have all the features listed above (either CXM or DXM) and the control board will be supplied with a LONWORKS interface board, which is LONMark certified. This will permit all units to be daisy chained via a 2-wire twisted pair shielded cable. The following points must be available at a central or remote computer location:

- a. Space temperature
- b. Leaving water temperature
- c. Discharge air temperature
- d. Command of space temperature setpoint
- e. Cooling status
- f. Heating status
- g. Low temperature sensor alarm
- h. Low pressure sensor alarm
- i. High pressure switch alarm
- j. Condensate sensor alarm
- k. Hi/low voltage alarm
- l. Fan "ON/AUTO" position of space thermostat as specified above
- m. Unoccupied / occupied command
- n. Cooling command
- o. Heating command
- p. Fan "ON / AUTO" command
- q. Fault reset command
- r. Itemized fault code revealing reason for specific shutdown fault (any one of 7)

This option also provides the upgraded 75VA control transformer with load side short circuit and overload protection via a built in circuit breaker.

**Option: MPC (Multiple Protocol Control) interface system**

Units shall have all the features listed above (either CXM or DXM) and the control board will be supplied with a Multiple Protocol interface board. Available protocols are BACnet MS/TP, Modbus, or Johnson Controls N2. The choice of protocol shall be field selectable/changeable via the use of a simple selector switch. Protocol selection shall not require any additional programming or special external hardware or software tools. This will permit all units to be daisy chain connected by a 2-wire twisted pair shielded cable. The following points must be available at a central or remote computer location:

- a. Space temperature
- b. Leaving water temperature
- c. Discharge air temperature
- d. Command of space temperature setpoint
- e. Cooling status
- f. Heating status
- g. Low temperature sensor alarm
- h. Low pressure sensor alarm
- i. High pressure switch alarm
- j. Condensate overflow alarm
- k. Hi/low voltage alarm
- l. Fan "ON/AUTO" position of space thermostat as specified above
- m. Unoccupied / occupied command
- n. Cooling command
- o. Heating command
- p. Fan "ON / AUTO" command
- q. Fault reset command
- r. Itemized fault code revealing reason for specific shutdown fault (any one of 7)

This option also provides the upgraded 75VA control transformer with load side short circuit and overload protection via a built in circuit breaker.

#### Return Panel / Supply Grilles:

The return panel shall be architecturally designed, acoustic type, flush mounted with hinged door for easy and quick access to filter and unit interior. Chassis shall be easily removed. The hinged return panel shall be made of heavy gauge die formed galvanized steel with a powder coat finish in "polar ice" color. **Return air panels that protrude from wall more than 5/8 inch (15.9mm) are not acceptable.** Supply grille(s) shall be architecturally designed "brushed" aluminum or powder coated steel (color: polar ice).

*Option: supply grille with Double deflection damper style louvers.*

*Option: Style "H" Return air panel that allows outside air entry just behind panel on right or left side (Note: This option eliminates unit-mounted thermostat option).*

#### Warranty:

Climate Master shall warranty equipment for a period of 12 months from start up or 18 months from shipping (which ever occurs first).

*Option: Extended 4-year compressor warranty covers compressor for a total of 5 years.*

*Option: Extended 4-year refrigeration circuit warranty covers coils, reversing valve, expansion valve and compressor for a total of 5 years.*

*Option: Extended 4-year control board warranty covers the CXM/DXM control board for a total of 5 years.*

#### FIELD INSTALLED OPTIONS

##### Hose Kits - AHH Series (required for field water connections):

Water connections between chassis and the cabinet shall be accomplished via a hose kit consisting of Kevlar-reinforced EPDM core hose surrounded by a stainless-steel braid. Hose kit shall have brass fittings with stainless-steel ferrules. Hose ends shall be solid External NPT which connects to mating fitting on cabinet shut off ball valve(s), and Internal NPSM (National Pipe Straight Mechanical) swivel end with fiber or EPDM washer which connects to mating threaded end connection on chassis. The hose kit shall be rated for 350 psi (2412 kPa) design working pressure. This hose kit accessory is required for each cabinet.

##### Thermostats:

The thermostat shall be a ClimateMaster mechanical or electronic type thermostat as selected below with the described features:

- a. Single Stage Standard Manual Changeover (ATM11C01)  
Thermostat shall be a single-stage, vertical mount, manual changeover with HEAT-OFF-COOL system switch and fan ON-AUTO switch. Thermostat shall have a mechanical temperature indicator and set point indication. Thermostat shall only require 4 wires for connection. Mercury bulb thermostats are not acceptable.
- b. Single Stage Digital Manual Changeover with Two-Speed Fan Control (ATM11C03) – DXM and PSC Fan required  
Thermostat shall be a single-stage, digital, manual changeover with HEAT-OFF-COOL system switch, fan ON-AUTO switch, and fan LO-HI switch. Thermostat shall have an LCD display with temperature and set-point(s) in °F or °C. The Thermostat



## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D

shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to display specific fault condition. Thermostat shall come standard with remote temperature sensor, but may be operated with internal sensor if desired via installation of a jumper.

- c. Single Stage Digital Auto or Manual Changeover (ATA11U01)  
Thermostat shall be a single-stage, digital, auto or manual changeover with HEAT-OFF-COOL-AUTO system switch and fan ON-AUTO switch. Thermostat shall have an LCD display with temperature and set-point(s) in °F or °C. The Thermostat shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to display specific fault condition. Thermostat shall provide temperature display offset for custom applications.
- d. Single Stage Digital Automatic Changeover with Two-Speed Fan Control (ATA11C04) – DXM and PSC Fan required  
Thermostat shall be a single-stage, digital, auto or manual changeover with HEAT-OFF-COOL-AUTO system switch, fan ON-AUTO switch, and fan LO-HI switch. Thermostat shall have an LCD display with temperature and set-point(s) in °F or °C. The Thermostat shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to display specific fault condition. Thermostat shall come standard with remote temperature sensor, but may be operated with internal sensor if desired via installation of a jumper.
- e. Multistage Digital Automatic Changeover (ATA22U01)  
Thermostat shall be multi-stage (2H/2C), manual or automatic changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Thermostat shall have an LCD display with temperature, set-point(s), mode, and status indication. The temperature indication shall be selectable for °F or °C. The thermostat shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to indicate specific fault condition(s). Thermostat shall provide temperature display offset for custom applications. Thermostat shall allow unit to provide better dehumidification with optional DXM controller by automatically using lower fan speed on stage 1 cooling (higher latent cooling) as main cooling mode, and automatically shifting to high speed fan on stage 2 cooling.
- f. Single Stage Manual Changeover Programmable 5/2 Day (ATP11N01)  
Thermostat shall be 5 day/2 day programmable (with up to 4 set points per day), single stage (1H/1C), manual changeover with HEAT-OFF-COOL system settings and fan ON-AUTO settings. Thermostat shall have an LCD display with temperature, set-point(s), mode, and status indication. The temperature indication shall be selectable for °F or °C. The thermostat shall provide permanent memory of set-point(s) without batteries. Thermostat shall provide convenient override feature to temporarily change set point.
- g. Multistage Automatic or Manual Changeover Programmable 5/2 Day (ATP21U01)  
Thermostat shall be 5 day/2 day programmable (with up to 4 set points per day), multi-stage (2H/1C), automatic or manual changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Thermostat shall have an LCD display with temperature, set-point(s), mode, and status indication. The temperature indication shall be selectable for °F or °C. The thermostat shall provide permanent memory of set-point(s) without batteries. Thermostat shall provide convenient override feature to temporarily change set point.
- h. Multistage Automatic or Manual Changeover Programmable 7 Day (ATP32U01)  
Thermostat shall be 7 day programmable (with up to 4 set points per day), multi-stage (3H/2C), automatic or manual changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Thermostat shall have a blue backlit dot matrix LCD display with temperature, set-points, mode, and status indication. The temperature indication shall be selectable for °F or °C. Time display shall be selectable for 12 or 24 hour clock. Fault identification shall be provided (when used with ClimateMaster CXM or DXM controls) to simplify troubleshooting by providing specific unit fault at the thermostat with red backlit LCD during unit lockout. The thermostat shall provide permanent memory of set-points without batteries. Thermostat shall provide heating set-point range limit, cooling set-point range limit, temperature display offset, keypad lockout, dead-band range setting, and inter-stage differential settings. Thermostat shall provide progressive recovery to anticipate time required to bring space temperature to the next programmed event. Thermostat shall provide an installer setup for configuring options and for setup of servicing contractor name and contact information. Thermostat shall allow the use of an accessory remote and/or outdoor temperature sensor (AST008). Thermostat navigation shall be accomplished via five buttons (up/down/right/left/select) with menu-driven selections for ease of use and programming.
- i. Multistage Automatic or Manual Changeover Programmable 7 Day with Humidity Control (ATP32U02)  
Thermostat shall be 7 day programmable (with up to 4 set points per day), multi-stage (3H/2C), automatic or manual changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Separate dehumidification and humidification set points shall be configurable for discreet outputs to a dehumidification option and/or an external humidifier. Installer configuration mode shall allow thermostat dehumidification mode to operate with ClimaDry reheat or with ECM fan dehumidification mode via settings changes. Thermostat shall have a blue backlit dot matrix LCD display with temperature, relative humidity, set-points, mode, and status indication. The temperature indication shall be selectable for °F or °C. Time display shall be selectable for 12 or 24 hour clock. Fault identification shall be provided (when used with ClimateMaster CXM or DXM controls) to simplify troubleshooting by providing specific unit fault at the thermostat with red backlit LCD during unit lockout. The thermostat shall provide permanent memory of set-points without batteries. Thermostat shall provide heating set-point range limit, cooling set-point range limit, temperature display offset, keypad lockout, dead-band range setting, and inter-stage differential settings. Thermostat shall provide progressive recovery to anticipate time required to bring space temperature to the next programmed event. Thermostat shall provide an installer setup for configuring options and for setup of servicing contractor name and contact information. Thermostat shall allow the use of an accessory remote and/or outdoor temperature sensor (AST008). Thermostat navigation shall be accomplished via five

buttons (up/down/right/left/select) with menu-driven selections for ease of use and programming.

**DDC Sensors:**

ClimateMaster wall mounted DDC sensor to monitor room temperature and interfaces with optional interface system described above. Several types as described below:

- a. Sensor only with no display (LON and MPC).
- b. Sensor with override (LON only).
- c. Sensor with setpoint and adjustment override (MPC only).
- d. Sensor with setpoint and adjustment override, LCD display, status/fault indication (LON and MPC).



## Section Change Log

Date:	Item:	Action:
05/23/07	Specifications	Updated for new Safety Agency
05/23/07	Decoders	Updated Cabinet and Chassis Decoders
01/01/07	First Published	

**Notes:**

## Tranquility Vertical Stack (TRM) Series

Rev.: 05/23/07D